


ALL FIRE PROTECTION SYSTEM DEVICES AND PIPING SHOWN ARE DIAGRAMMATICAL AND ARE FOR REFERENCE ONLY. CONTRACTOR IS RESPONSIBLE TO FIELD VERIFY EXISTING CONDITIONS, INCLUDING BUT NOT LIMITED TO, NUMBER OF SPRINKLER HEADS, PIPE SIZES, DEVICE LOCATIONS, AND ASSOCIATED CONTROLS. CONTRACTOR SHALL DESIGN AND INSTALL A NEW FIRE PROTECTION SYSTEM AS PER REQUIREMENTS OF NFPA 13 AND AUTHORITY HAVING JURISDICTION FOR THIS TYPE OF BUILDING CLASSIFICATION (R-2). CONTRACTOR SHALL PERFORM WATER FLOW TESTS, PROVIDE SIGNED AND SEALED HYDRAULIC CALCULATIONS AND FIRE PROTECTION PLANS, ALONG WITH FIRE PROTECTION EQUIPMENT SHOP DRAWINGS, TO THE ARCHITECT TO BE SUBMITTED TO NJ DCA.

2 PART SECOND FLR SPRINKLER PLAN (TYPICAL)
1/4" = 1'-0"

THIS DRAWING IS FOR INFORMATIONAL PURPOSES ONLY

R C P L E G E N D		
SYMBOL	DESCRIPTION	NOTES
← SH	SIDEWALL SPRINKLER HEAD	PROVIDE NEW CONCEALED SIDEWALL SPRINKLER HEAD WITH COVER AT NEW GWB SOFFIT WHERE OCCURS. USE VIKING QUICK RESPONSE OR EQUAL SIDEWALL SPRINKLER COVER
• SH	SPRINKLER HEAD (DOWNWARD)	PROVIDE NEW CONCEALED SPRINKLER HEAD IN NEW GWB SOFFITS
⊙ SH	SPRINKLER HEAD (UPRIGHT)	EXISTING TO REMAIN OR TO BE REWORKED

NOTE: SPRINKLER HEADS TO BE TAMPER-RESISTANT
SPRINKLER SUBCONTRACTOR TO HAVE PROPER APPLICABLE NJ DCA CLASSIFICATION AND CREDENTIALS

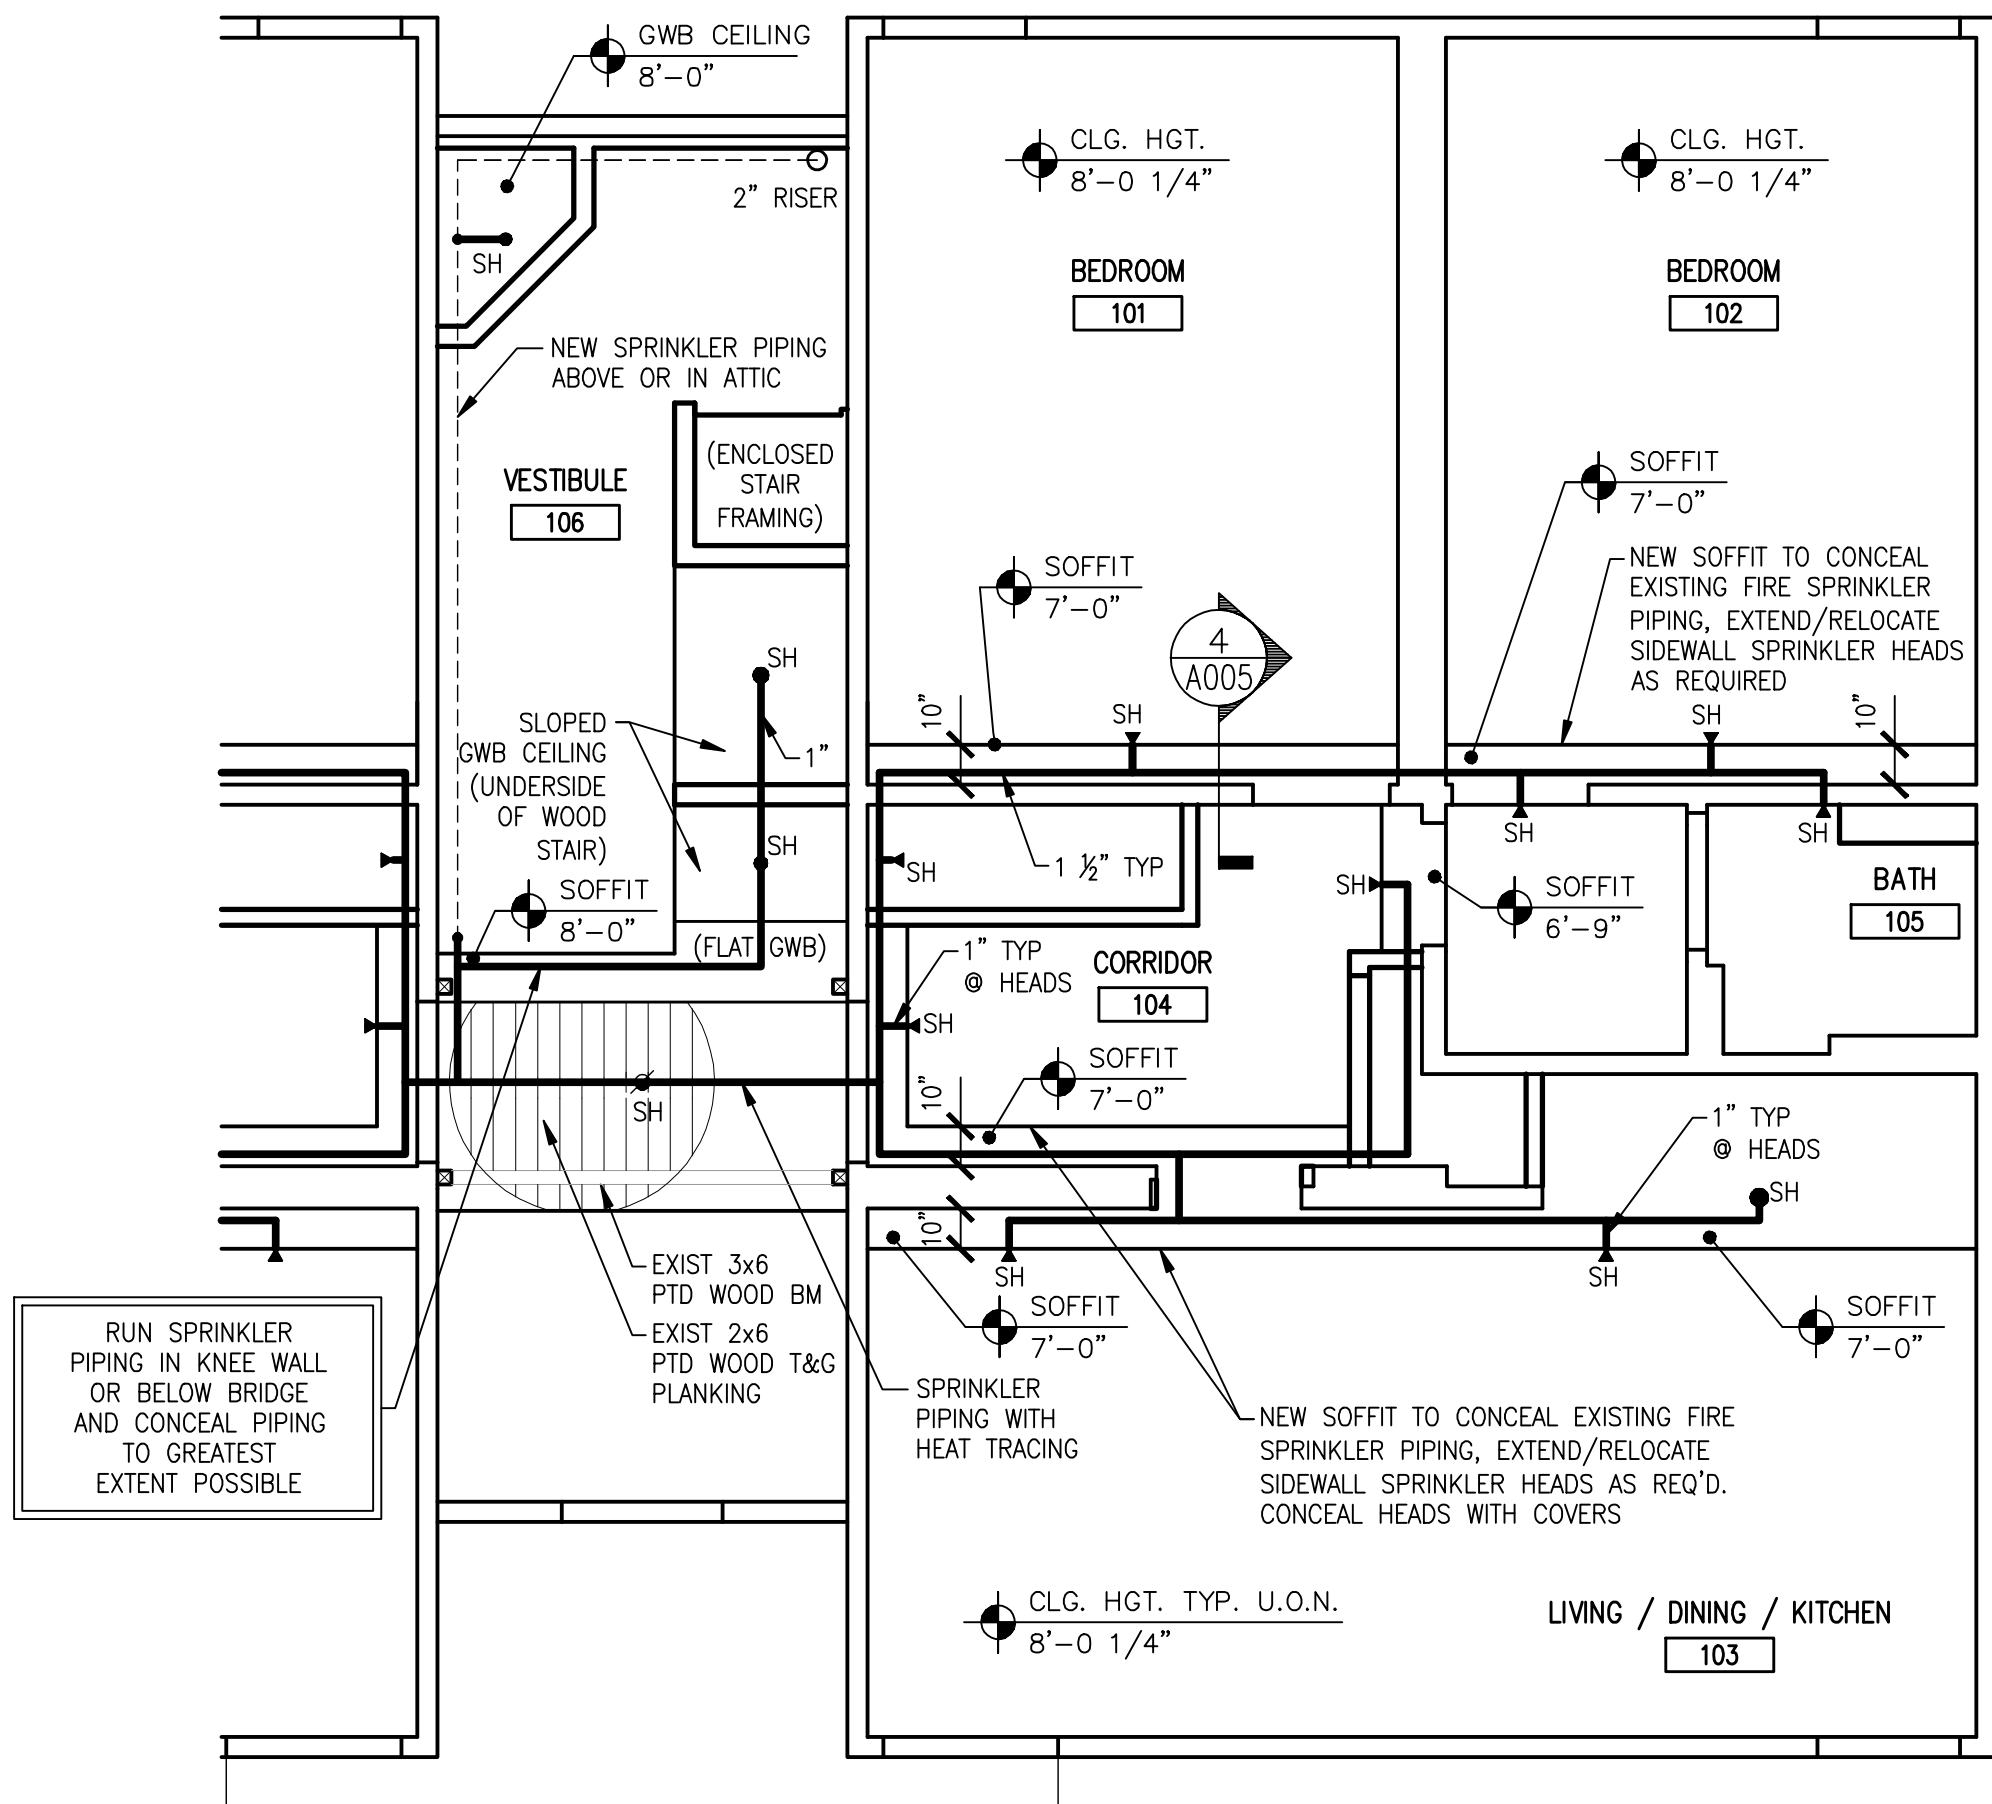

1 PART FIRST FLR SPRINKLER PLAN (TYPICAL)
1/4" = 1'-0"

COMERRO COPPA, P.C.
ARCHITECTS
97 LACKAWANNA AVENUE
TOTOWA, NJ 07512
TEL: (973) 890-8989
FAX: (973) 890-8855
E-MAIL: architects@comerrocoppa.com

S. M. COPPA, AIA
AI-08322

RAMAPO COLLEGE OF NEW JERSEY
"BUCKEYE" RESIDENCE INTERIOR RENOVATION
505 RAMAPO VALLEY ROAD, MAHWAH, NEW JERSEY

ADDENDUM 2 1-16-15
REVISION DATE

DRAWING TITLE
FIRST AND
SECOND FLOOR
FP PLANS

DATE
12/3/2014

SCALE
AS NOTED

DRAWN

CHECKED
JMV

DRAWING #

FP101

SHEET _____ of _____
PROJECT # 1420