



ENLARGED FIRST FLOOR HVAC DEMO PLAN
SCALE: 1/4"=1'-0"

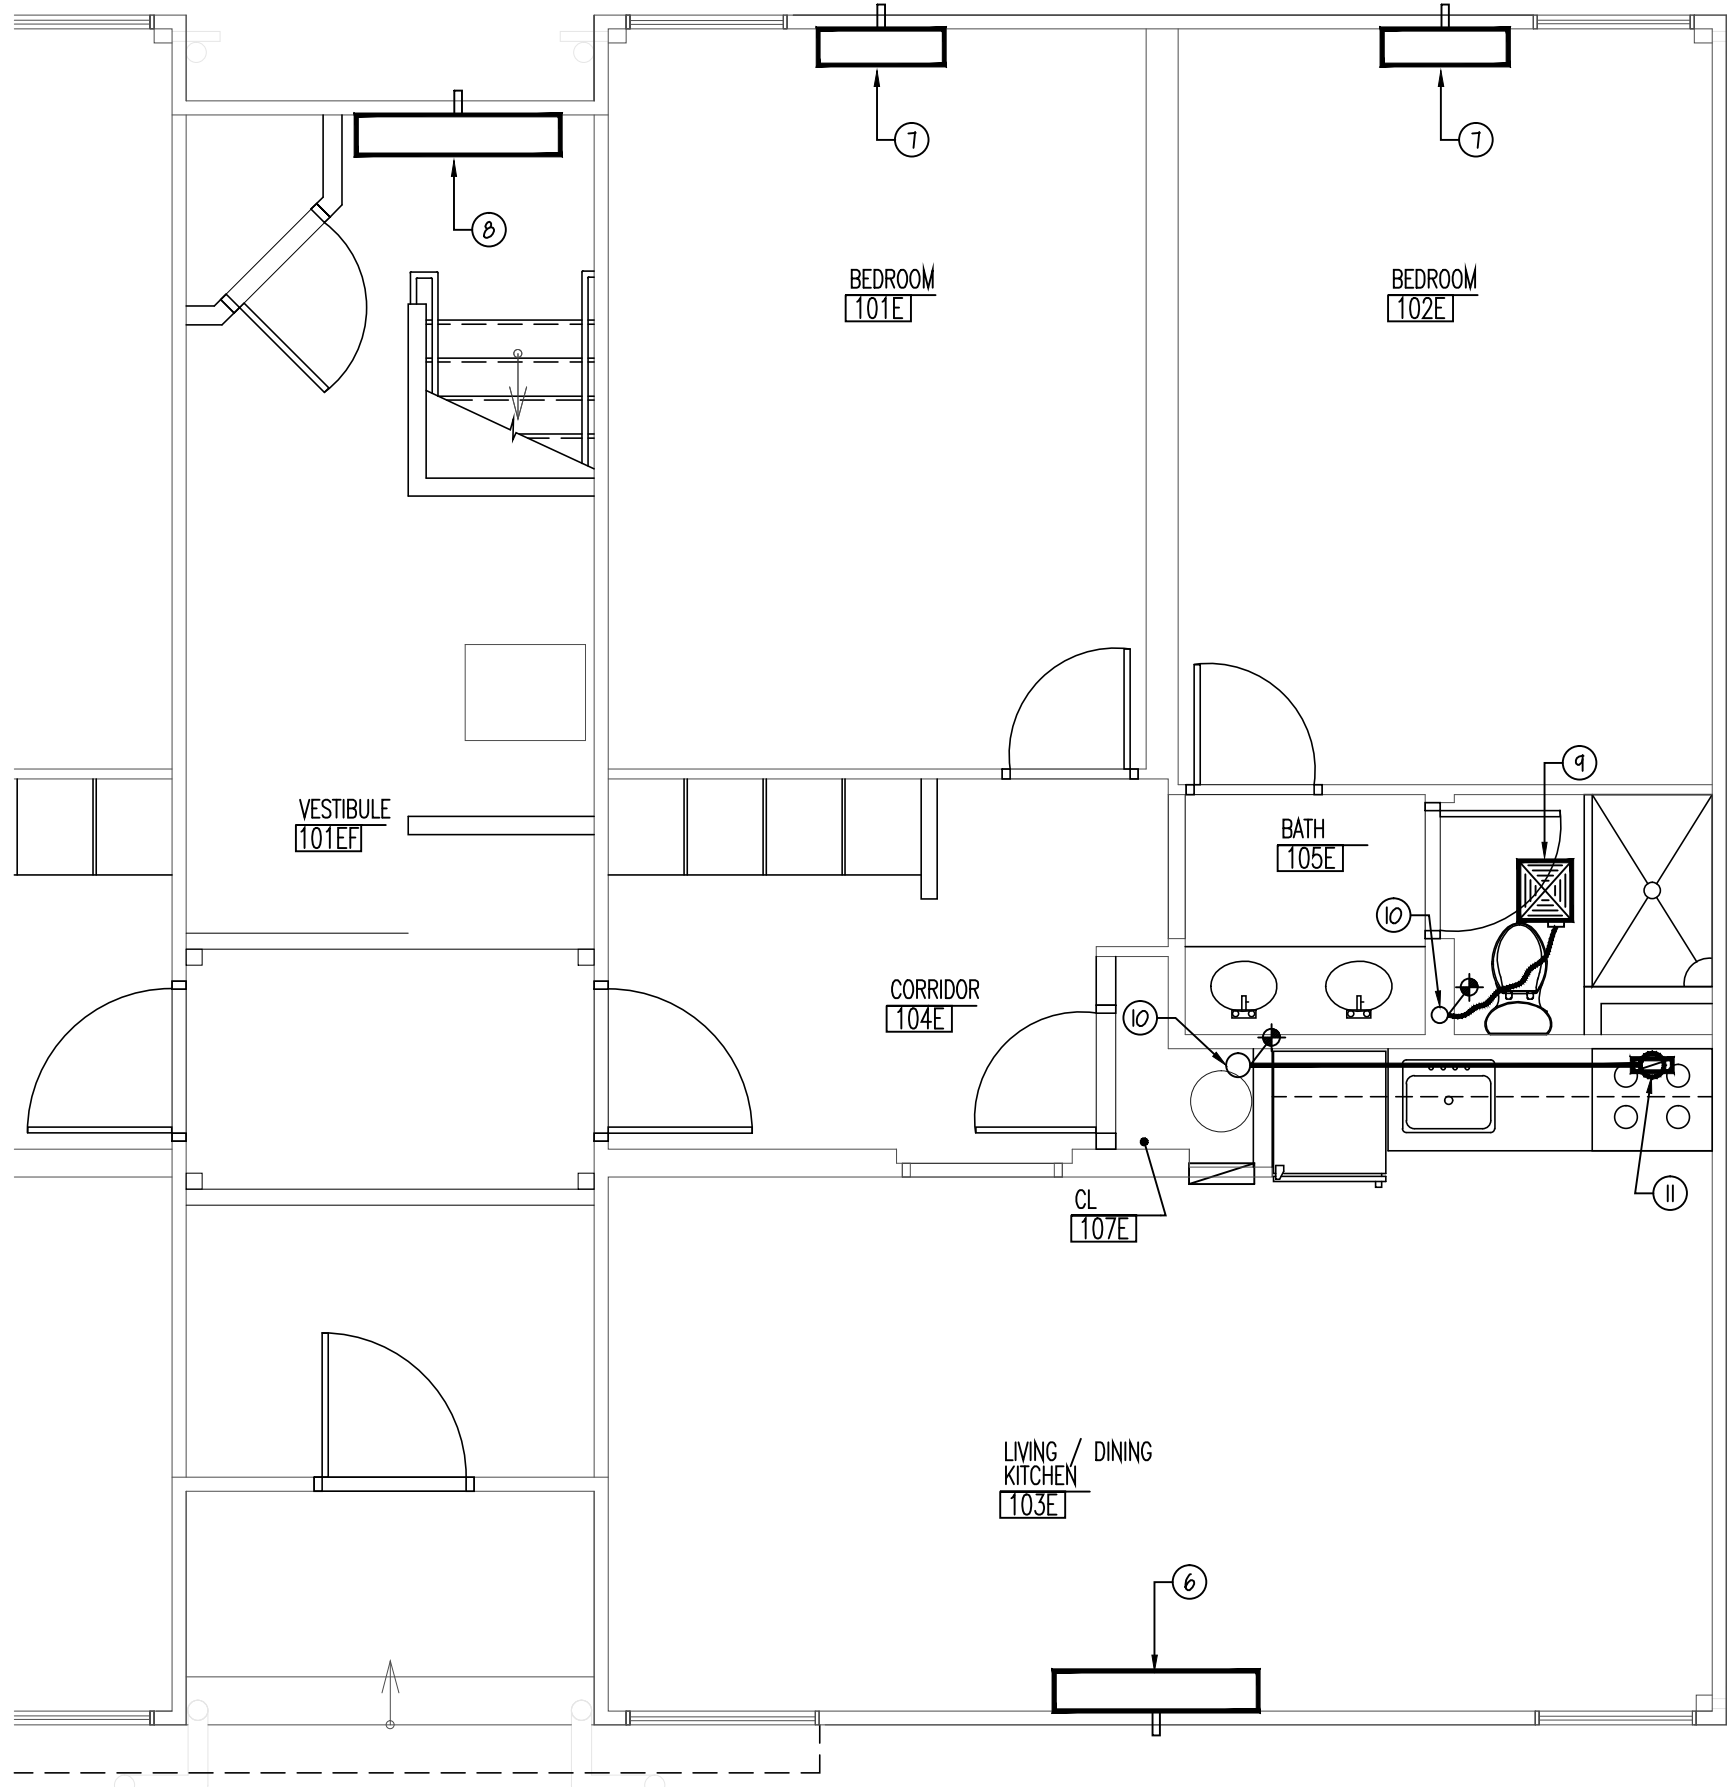


ENLARGED FIRST FLOOR HVAC PLAN
SCALE: 1/4"=1'-0"

KEY NOTES:

- 1 REMOVE EXISTING FAN COIL UNIT.
- 2 REMOVE EXISTING TOILET EXHAUST FAN AND FLEXIBLE DUCT.
- 3 EXISTING 4" TOILET EXHAUST DUCT RISER TO REMAIN.
- 4 REMOVE EXISTING HOOD EXHAUST DUCT.
- 5 EXISTING 6" HOOD EXHAUST DUCT RISER TO REMAIN.
- 6 NEW FAN COIL UNIT MANUFACTURED BY TRANE MODEL "YCB0020JAAH8H8AG2H". RE-CONNECT PIPING TO FAN COIL UNIT AS REQUIRED. PROVIDE NEW COPPER DRAIN PIPE WITH COPPER ESCUTCHEON AT EXTERIOR MALL.
- 7 NEW FAN COIL UNIT MANUFACTURED BY TRANE MODEL "YCB0020JAAH8H8AG2H". RE-CONNECT PIPING TO FAN COIL UNIT AS REQUIRED. PROVIDE NEW COPPER DRAIN PIPE WITH COPPER ESCUTCHEON AT EXTERIOR MALL.
- 8 NEW FAN COIL UNIT MANUFACTURED BY TRANE MODEL "YCB0020JAAH8H8AG2H". EXTEND AND RE-CONNECT PIPING TO FAN COIL UNIT AS REQUIRED. PROVIDE NEW COPPER DRAIN PIPE WITH COPPER ESCUTCHEON AT EXTERIOR MALL. CONTRACTOR TO PATCH AND REPAIR EXISTING DRAIN PENETRATION TO MATCH EXISTING.
- 9 NEW EXHAUST FAN MANUFACTURED BY BROAD MODEL "W1" TO CONNECT TO EXISTING DUCT RISER WITH 4" FLEXIBLE DUCT.
- 10 SEAL ALL JOINTS IN EXISTING TOILET AND KITCHEN EXHAUST DUCT RISER WITH NEW MASTIC.
- 11 NEW 10"x3-1/4" DUCT TRANSITION TO 6" TO RUN IN CEILING TO CONNECT TO EXISTING EXHAUST DUCT RISER.

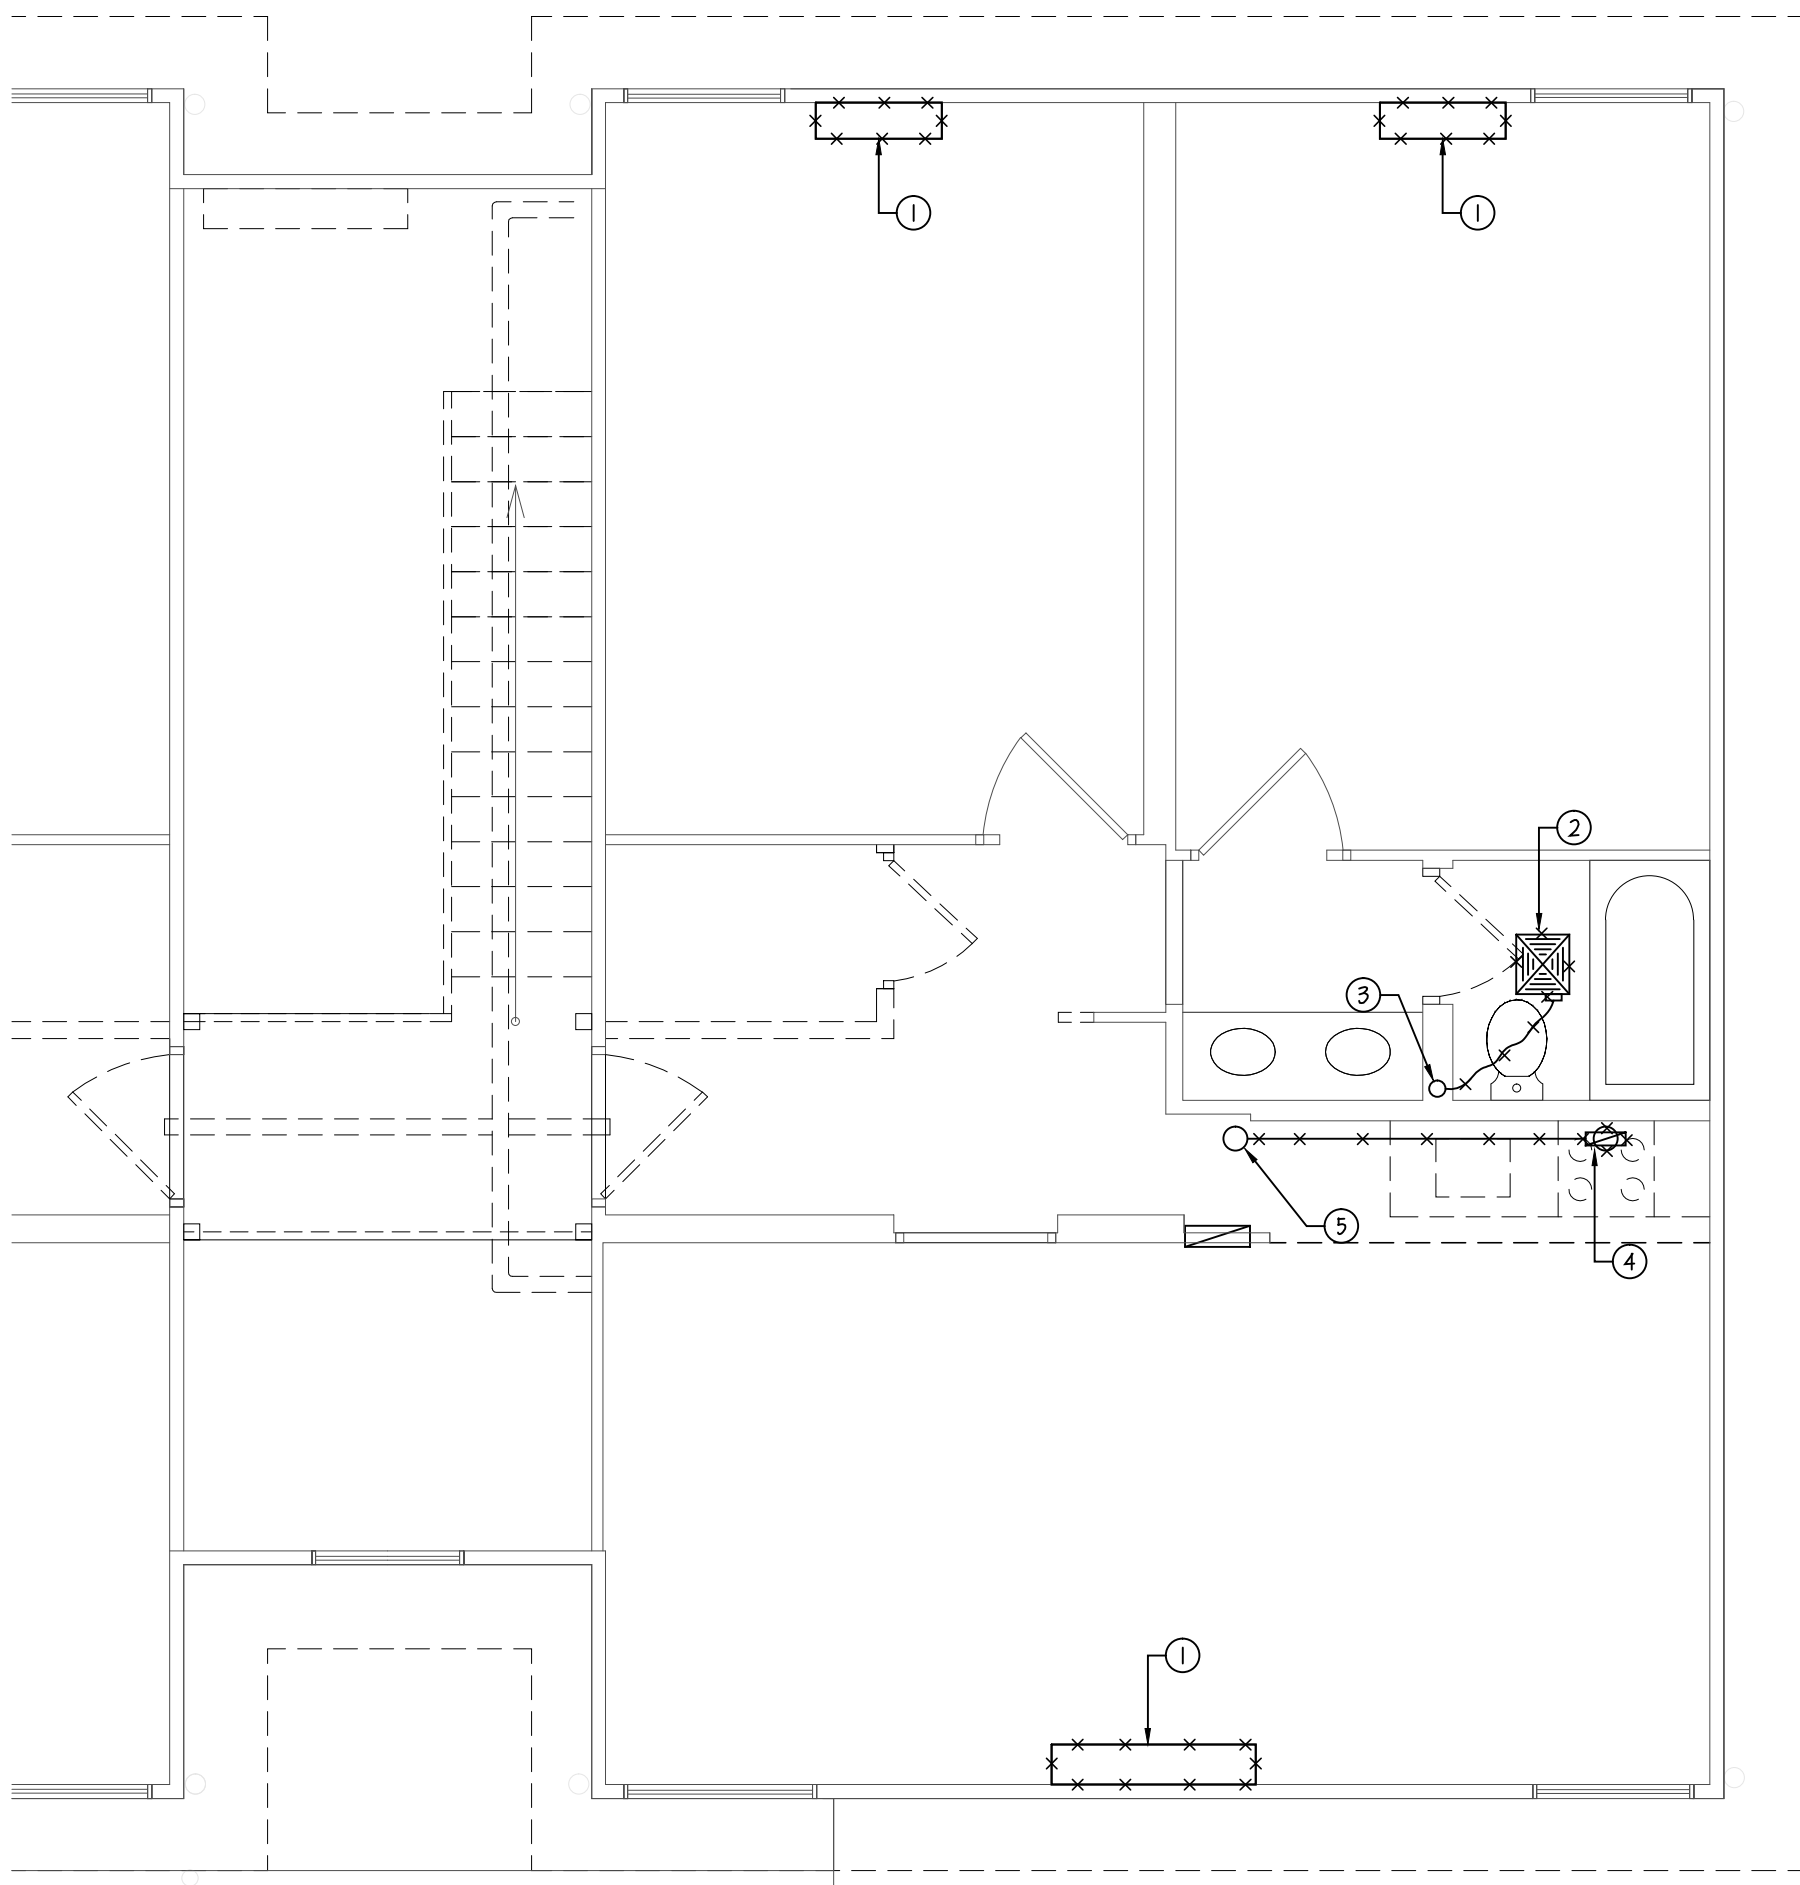

ENLARGED SECOND FLOOR HVAC DEMO PLAN
SCALE: 1/4"=1'-0"

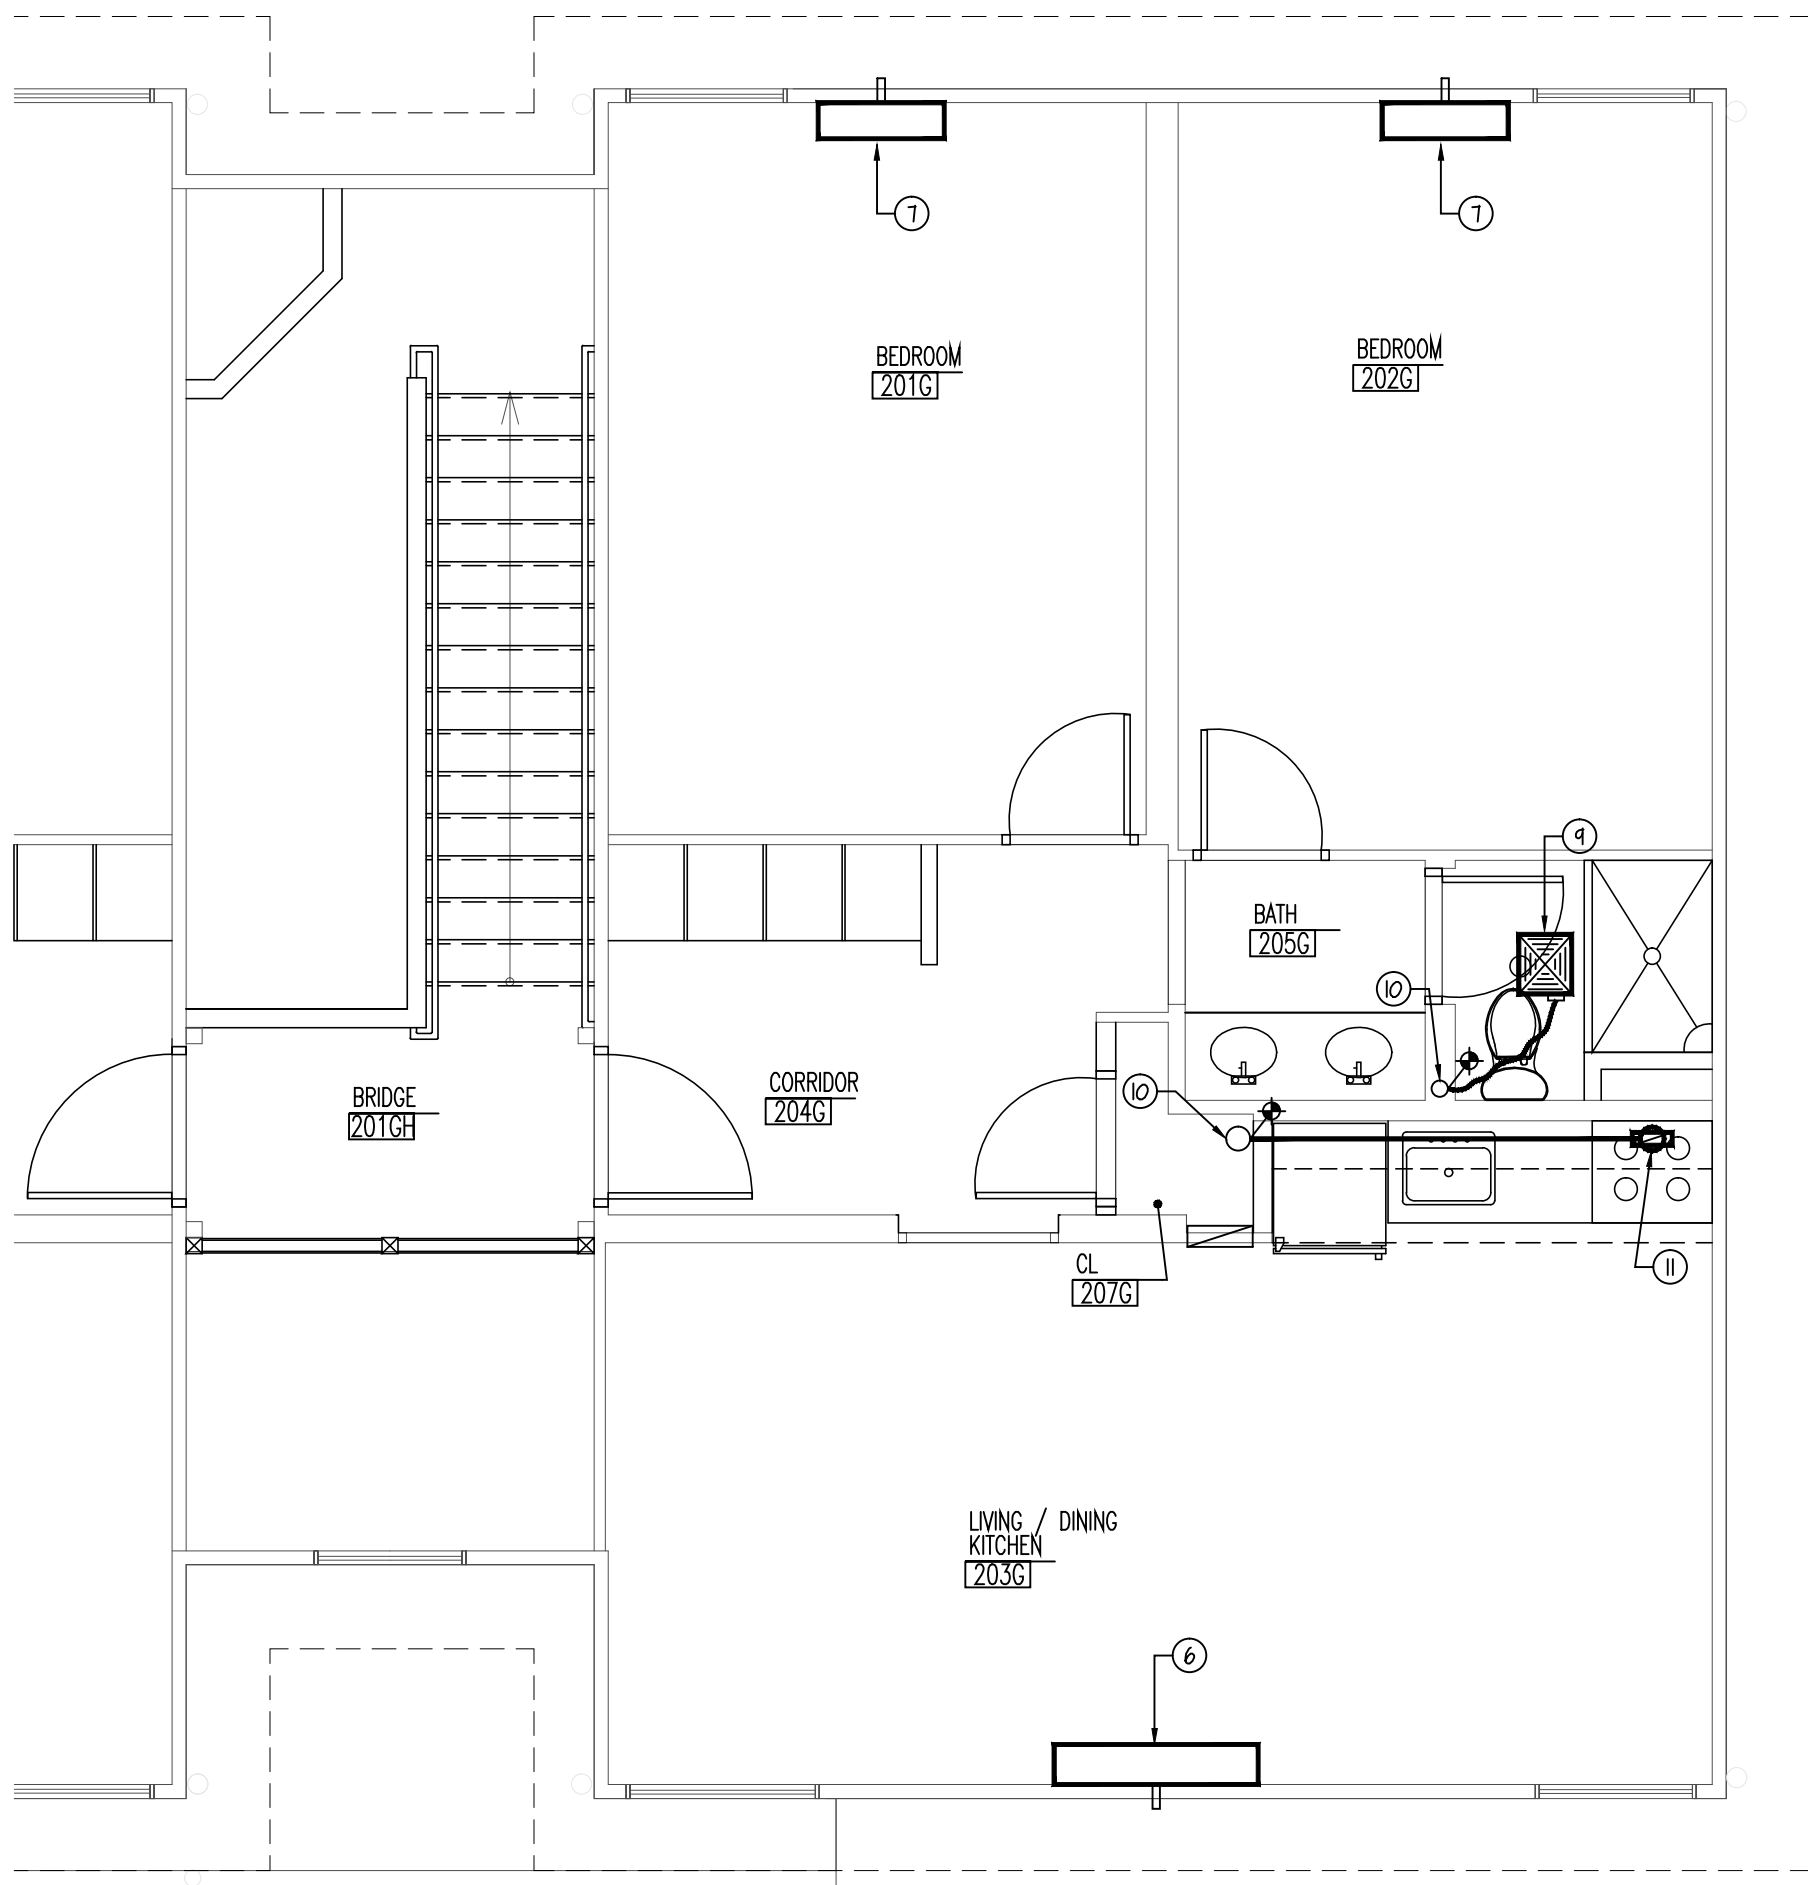

ENLARGED SECOND FLOOR HVAC PLAN
SCALE: 1/4"=1'-0"

Revisions

Date	Issue	Description
03-06-15	1	ISSUED FOR DCA FILING
03-18-15	2	ISSUED FOR BIDDING

Consultants

LINWOOD ENGINEERING ASSOCIATES, P.A.

CONSULTING MECHANICAL & ELECTRICAL ENGINEERS

LEA 955 Lincoln Ave. 2301 Dupont Drive-Suite 150
Glen Rock, New Jersey Irvine, California
07452 92512
t: 201.857.3998 f: 714.424.0001
t: 201.857.3994 f: 714.424.0004
www.linwoodengineering.com

Michael T. Davina, P.E.

NJ #48654
CT #0025779

Robert J. Hatch, P.E.

AR #13868
CA #E16118
CT #13318
FL #69560
MA #48516
NJ #30419
NV #0199375
NY #56608
PA #036014-E

Project

INTERIOR RENOVATIONS
AT THE
HOLLY-C RESIDENCE
RAMAPO COLLEGE
OF NEW JERSEY
505 Ramapo Valley Road
Mahwah, New Jersey 07430-1680


Client

RAMAPO COLLEGE
OF NEW JERSEY
505 Ramapo Valley Road
Mahwah, New Jersey 07430-1680

SNS Architects & Engineers, PC

1 PARAGON DRIVE . MONTVALE . NEW JERSEY . 07645
tel: 201.573.1767 fax: 201.573.0808 www.sns-arch-eng.com

Fay W. Logan, AIA
John M. Lignos, AIA
Lorin J. Sonenshine, AIA
Steven Napolitano, PE



Cert./Lic. No.
Date 02-03-15 Scale AS NOTED
Drawn By PJCadd Checked By MD
Dwg. Title
ENLARGED FIRST & SECOND FLOOR
HVAC PLANS

Work Order No. Dwg. No.

4698C M200