



1 ENLARGED STAIR PLAN  
SCALE: 1/2" = 1'-0"

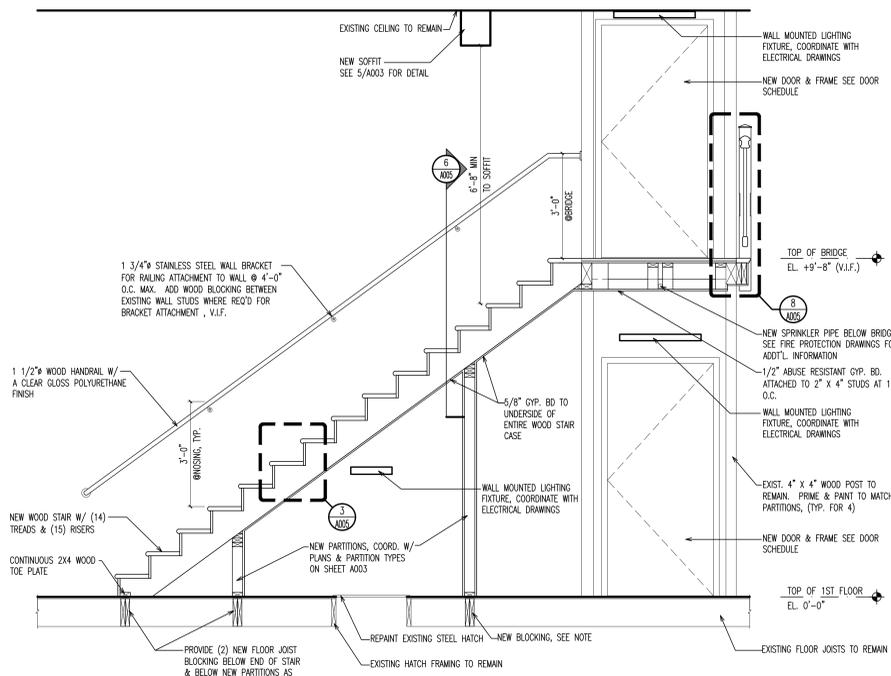


2 STAIR SECTION  
SCALE: 1/2" = 1'-0"

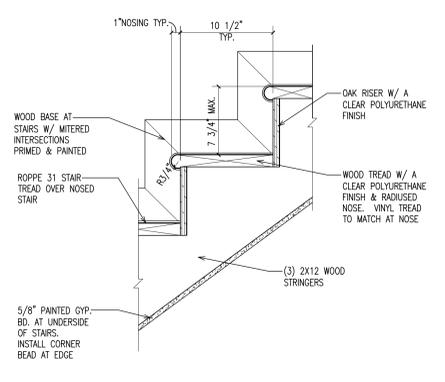


3 STAIR SECTION DETAIL  
SCALE: 1 1/2" = 1'-0"


**STAIR & BASE MOLDING NOTES:**  
 1. COUNTER SINK ALL NAILS & COVER OPENINGS W/ PUTTY TO MATCH WOOD FINISH.  
 2. WHERE SEALANT IS REQ'D., PROVIDE COLOR TO MATCH WHERE APPLIED.  
 3. FASTEN ALL MATERIALS WITH PROPER FASTENERS.  
 4. ALL PAINT COLORS TO BE SUBMITTED AND APPROVED BY ARCHITECT.  
 5. PROVIDE A VINYL J BEAD ALONG W/ SEALANT THAT MATCHES IN COLOR WHERE GYP. BD. EDGES ABUTS UP TO FINISHED WOOD SURFACES.  
 6. ALL LAG BOLT & SCREW HOLES ARE TO BE COUNTERSUNK AND FILLED W/ RED OAK DWEL PLUS CUT FLUSH AT OPENING WITH A FINISH TO MATCH ADJACENT SURFACE.

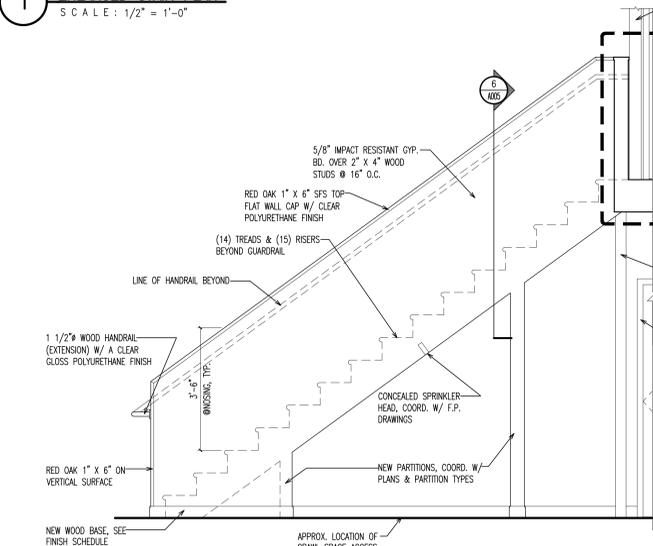


4 STAIR ELEVATION  
SCALE: 1/2" = 1'-0"

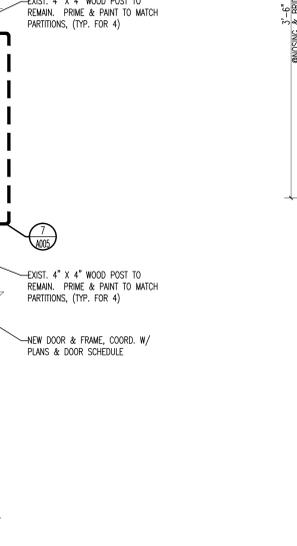


5 BRIDGE RAILING ELEVATION  
SCALE: 1/2" = 1'-0"

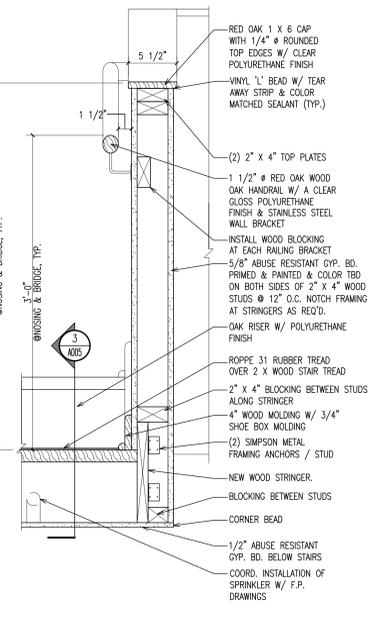

6 STAIR GUARDRAIL DETAIL  
SCALE: 1 1/2" = 1'-0"

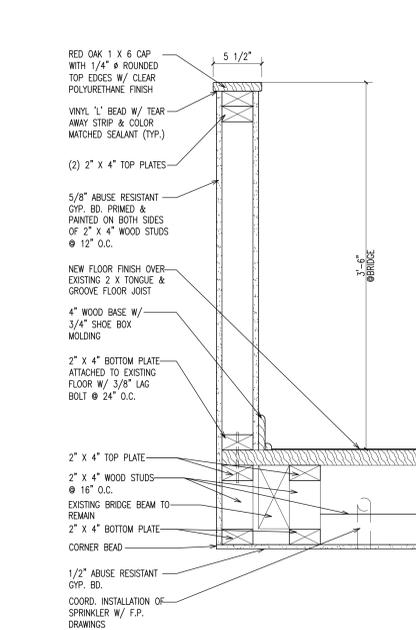

7 GUARDRAIL DETAIL @ BRIDGE  
SCALE: 1 1/2" = 1'-0"

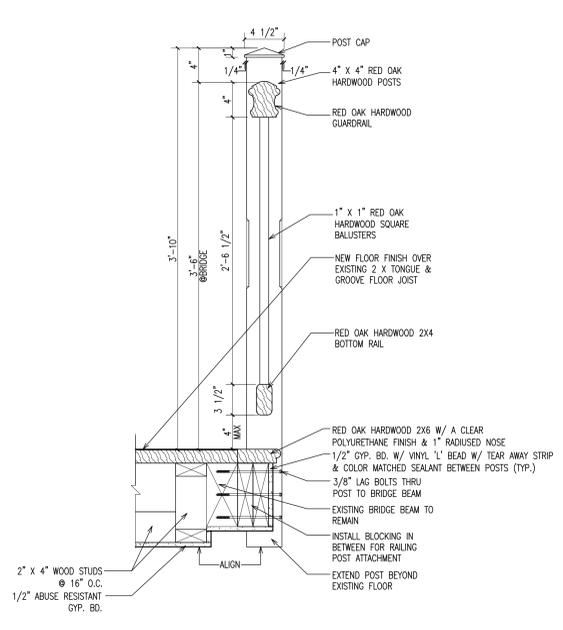


8 GUARDRAIL DETAIL  
SCALE: 1 1/2" = 1'-0"

LOCATION	FLOOR	BASE	WALLS	CEILING	REMARKS
BEDROOM	CARPET TILE	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	INTERFACE OR EQ CARPET TILE, TYP.
VESTIBULE	VINYL COMPOSITION TILE	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED EXPOSED WOOD STRUCTURE	
JANITOR CLOSET	VINYL COMPOSITION TILE	VINYL COVE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT & FRP PANELS TO 6'-0" AFF WITH FRP TRIM ON ALL WALLS	PAINTED EXPOSED WOOD STRUCTURE	
IT ROOM	VINYL COMPOSITION TILE	VINYL COVE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED EXPOSED WOOD STRUCTURE	
LIVING/ DINING/ KITCHEN	VINYL COMPOSITION TILE	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	VCT: ARMSTRONG STANDARD EXCELON IMPERIAL TEXTURE, COLOR PER ARCH. ADD ALTERNATE ARMSTRONG MARMORETTE LINOLEUM
HALL	VINYL COMPOSITION TILE	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	
BATHROOM	STONETEC ERF STONEHARD OR EQUAL POLYMER FLOOR COATING	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT & SOLID SURFACE PANELS	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	
CLOSET	VINYL COMPOSITION TILE	VINYL COVE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	
BRIDGE	VINYL COMPOSITION TILE	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED EXPOSED WOOD STRUCTURE	
STAIR	RUBBER TREADS ROPPE TREAD 31 OR EQUAL	PAINTED WOOD CLAM SHELL BASE AND BASE SHOE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED EXPOSED WOOD STRUCTURE	

**FINISH SCHEDULE NOTES:**  
 1. SUBMIT SAMPLES OF ALL MATERIALS SPECIFIED, FOR REVIEW AND APPROVAL BY SNS PRIOR TO ORDERING THE MATERIALS.  
 2. ALL FINISHES TO BE PROVIDED AND INSTALLED BY GENERAL CONTRACTOR  
 3. ALL SURFACES SHALL BE PREPARED TO RECEIVE NEW FINISHES (FLOOR, WALL, BASE) AS PER MANUFACTURER'S INSTRUCTIONS.  
 4. REFER TO ELEVATIONS AND DETAILS FOR LOCATION OF NEW FINISHES.  
 5. ALL FINISHES OCCUR IN THE LOCATIONS LISTED ABOVE AT ALL DORMITORIES AND SUPPORT SPACES ON ALL FLOORS.

Revisions

Date	Issue	Description
03-06-15	1	ISSUED FOR DCA FILING
03-18-15	1	ISSUED FOR BIDDING

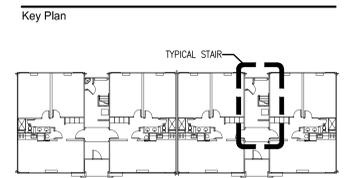

Typical Floor Consultants

**LEA**  
**LINWOOD ENGINEERING ASSOCIATES, P.A.**  
 CONSULTING ENGINEERS  
 955 Lincoln Avenue  
 Glen Rock, New Jersey 07452  
 TELEPHONE (201) 857-3998  
 FAX: (201) 857-3994

Project  
 INTERIOR RENOVATIONS AT THE  
**HOLLY-C RESIDENCE**  
  
**RAMAPO COLLEGE**  
 OF NEW JERSEY  
 505 Ramapo Valley Road  
 Mahwah, New Jersey 07430-1680

Client  
  
**RAMAPO COLLEGE**  
 OF NEW JERSEY  
 505 Ramapo Valley Road  
 Mahwah, New Jersey 07430-1680

**SNS** Architects & Engineers, PC  
 1 PARAGON DRIVE . . . MONTVALE . . . NEW JERSEY. 07645  
 TEL: 201.573.1767 FAX: 201.573.0806 www.sns-arch-eng.com

Fay W. Logan, AIA  
 John M. Lignos, AIA  
 Lorin J. Sonenshine, AIA  
 Steven Napolitano, PE

Cert./Lic. No. AI 109740  
 Date 01-09-15 Scale AS NOTED  
 Drawn By DP Checked By DP  
 Dwg. Title  
**STAIR PLAN & DETAILS & FINISH SCHEDULE**  
 Work Order No. Dwg. No.  
**4698C A005**