


1 ENLARGED BATHROOM & KITCHEN PLAN  
SCALE: 1/2" = 1'-0"


NOTE:  
AT ALL BATHROOMS FURNISH &  
INSTALL WATERPROOFING MEMBRANE  
BELOW FLOORING AND 4" UP WALLS.  
PROVIDE LATICRETE 9235 WATERPROOF  
MEMBRANE, SELF-CURING LIQUID  
RUBBER MEMBRANE W/ INTERNAL  
REINFORCING FABRIC, TYP.

#### EQUIPMENT SCHEDULE


MARK	DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
1	FLOOR DRAIN			REFER TO PLUMBING DRAWINGS. MOUNT FLUSH TO NEW FINISHED FLOORING
2	TOILET WITH SEAT COVER			REFER TO PLUMBING DRAWINGS
3	SHOWER BASE	VIGO	VG06049	32" X 48" COMPOSITE SHOWER PAN BASE W/ NEW DRAIN. PROVIDE NEW STAINLESS STEEL CURTAIN ROD & CURTAIN ABOVE.
4	POLYMER FLOOR COATING	STONHARD	STONETEC ERF	(POURED-IN-PLACE) WITH INTEGRAL COVE BASE WITH REGLET. INSTALL 1/4" HARDBACKER OR EQUAL UNDERLAYMENT. REPLACE ANY DAMAGED WOOD FLOOR SHEATHING AS REQ'D.
5	BATHROOM VANITY CABINETS	WEREVER OUTDOOR PRODUCTS	SOLID MARINE GRADE POLYMER OUTDOOR CABINETRY	ALL POLYMER DOORS, DRAWERS & CABINET CONSTRUCTION. SEE ELEVATIONS FOR CONFIGURATIONS
6	SOLID WALL SURFACE PANEL	ARRAY	WALL PANEL	1/4" THICK PANEL. SEE ELEVATION FOR HEIGHT. COLOR TO BE SELECTED
7	MARBLE THRESHOLD	DALTILE	SINGLE HOLYWOOD BEVEL	4" X 30" X 1/2"H
8	BATHROOM VANITY		VANITY TOP	SOLID SURFACE VANITY TOP W/ INTEGRAL DOUBLE SINKS
9	MIRROR	STYLE SELECTIONS	60" X 36" POLISHED EDGE WALL MIRROR	SEE ELEVATIONS
10	TOWEL HOOK	MOEN	YB8003CH	SEE ELEVATIONS
11	WATER HEATER			REFER TO PLUMBING DRAWINGS
12	REFRIGERATOR	GE	GTS18GTH	28" W X 67 1/2"H X 32 1/2"D
13	KITCHEN SINK			REFER TO MEP DRAWINGS
14	KITCHEN CABINETS	WEREVER OUTDOOR PRODUCTS	SOLID MARINE GRADE POLYMER OUTDOOR CABINETRY	ALL POLYMER DOORS, DRAWERS & CABINET CONSTRUCTION. SEE ELEVATIONS FOR CONFIGURATIONS
15	RANGE	GE	JBS600F	30" W X 47"H X 25 1/2"D
16	KITCHEN COUNTERTOP	LG HI-MACS	ACRYLIC-SOLID SURFACE	COLOR TO BE SELECTED IN PRICE GROUP 'B'
17	SHOWER HEAD AND CONTROLS			SEE PLUMBING DRAWINGS
18	CORNER SOAP DISH	ARRAY	CD0707	7" X 7", FINISH TO MATCH SHOWER WALL PANELS
19	RECESSED TOILET TISSUE DISPENSER	BOBRICK	B-667	
20	MICROWAVE / HOOD	GE	JWM31600F	30"W X 16"H X 6"D. VERIFY PLACEMENT OF INTEGRAL RANGE VENT.
21	BATHROOM EXHAUST FAN	BROAN	679	120V, 2.0 AMP, 70 CFM W/ 4" DUCT. SEE ELECTRICAL DWG. FOR ADDTL. INFORMATION
22	KITCHEN SINK FAUCET			REFER TO PLUMBING DRAWINGS
23	BATHROOM FAUCET			REFER TO PLUMBING DRAWINGS
24	BATHROOM VANITY LIGHT FIXTURE			REFER TO ELECTRICAL DRAWINGS
25	UNDER CABINET LIGHT FIXTURE			REFER TO ELECTRICAL DRAWINGS
26	SEMI-RECESSED FIRE EXTINGUISHER CABINET W/ FIRE EXTINGUISHER	LARSEN'S	SS-2409-R1	STAINLESS STEEL CABINET W/ 5LBS FIRE EXTINGUISHER
27	STAINLESS STEEL SHELF	BOBRICK	B-295X16	16" LONG X 5" DEEP W/ (2) BRACKETS. PROVIDE WOOD BLOCKING & USE SS SHEET METAL SCREWS
28	LINOLEUM FLOORING	ARMSTRONG	2.5 MM-MARMORETTE	PROVIDE WELDED SEAMS, COLOR TO BE SELECTED FROM MANUFACTURER'S FULL RANGE. ALTERNATE IN KITCHEN AREA
29	VINYL COMPOSITE TILE FLOORING	ARMSTRONG	IMPERIAL TEXTURE STANDARD EXCELON	BASE BID

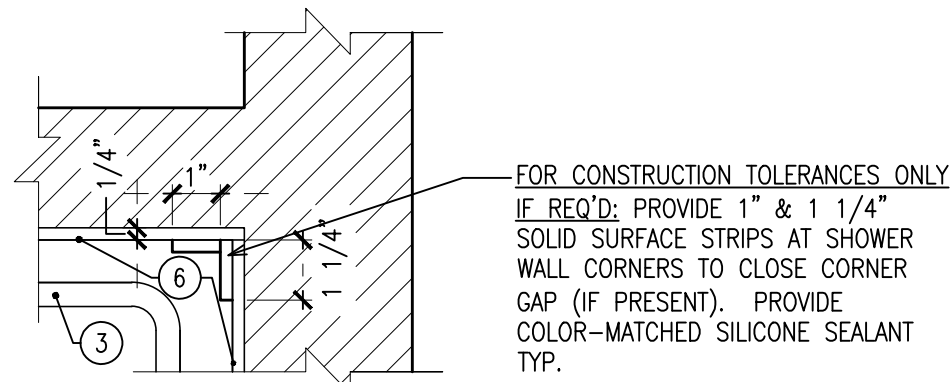


14 PLAN DETAIL AT SOLID SURFACE CORNER CONDITION  
SCALE: 3" = 1'-0"

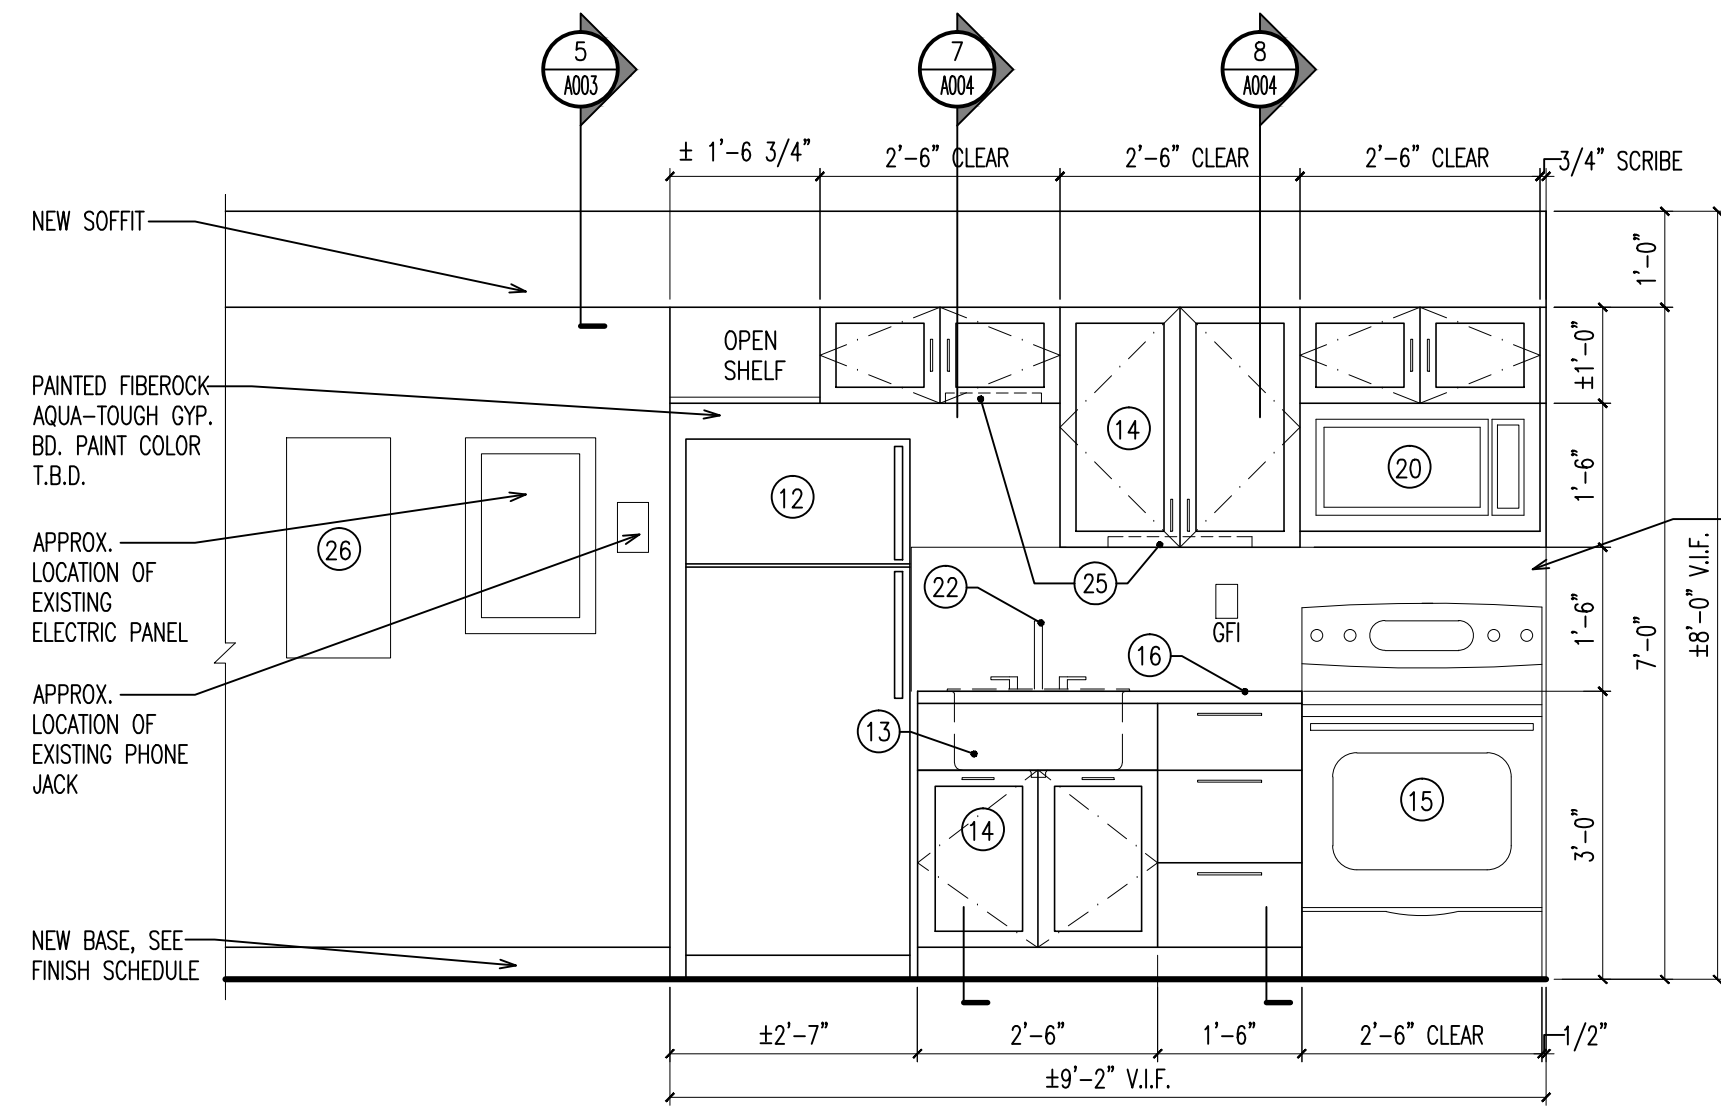


2 KITCHEN ELEVATIONS  
SCALE: 1/2" = 1'-0"

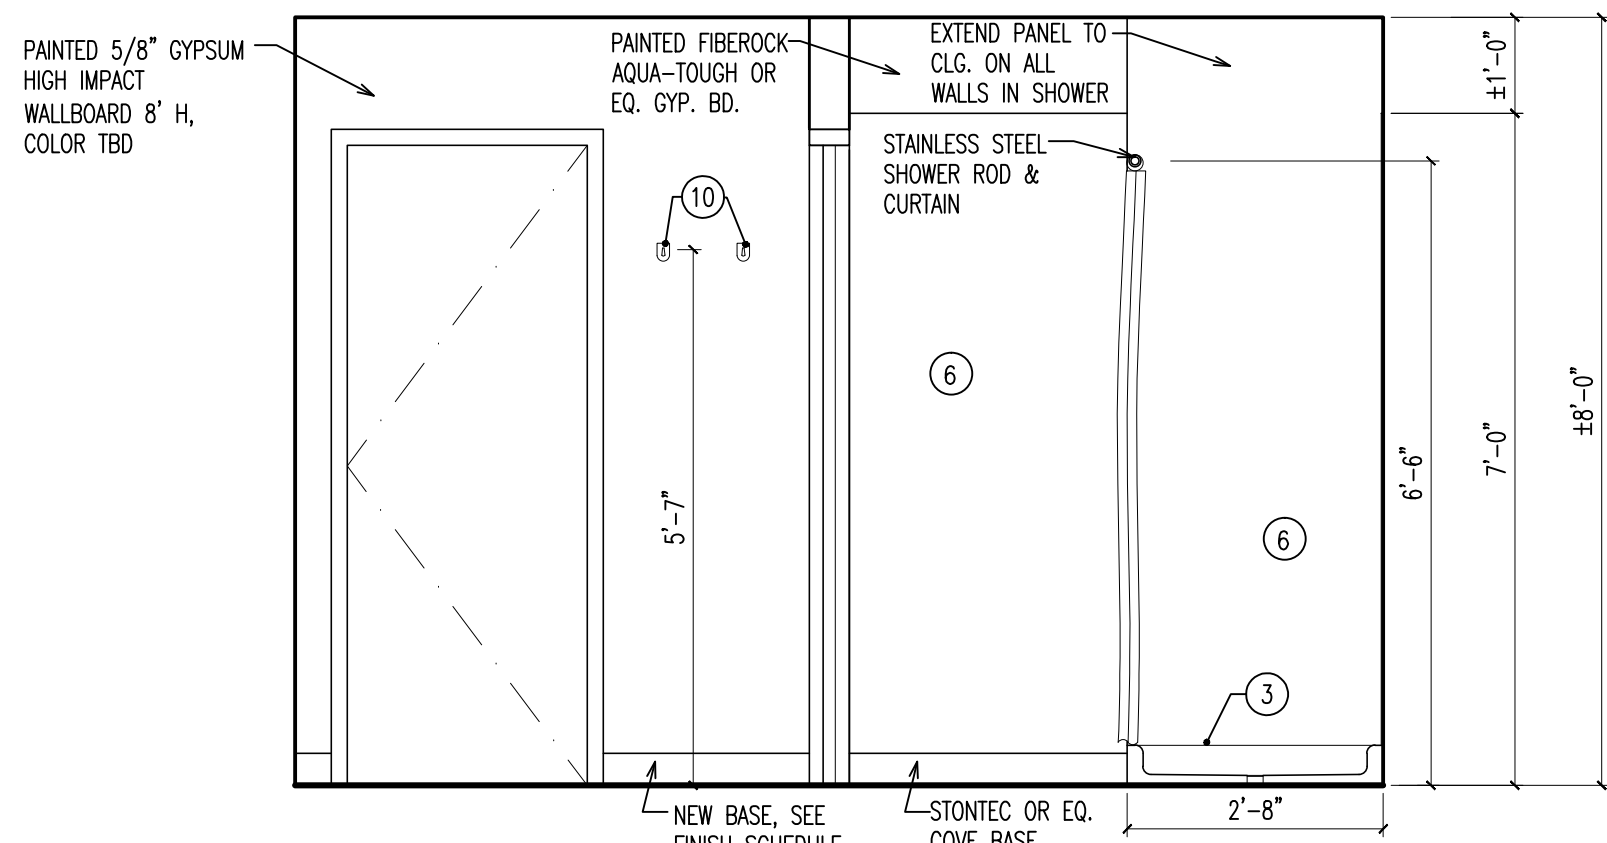


4 BATHROOM ELEVATIONS  
SCALE: 1/2" = 1'-0"

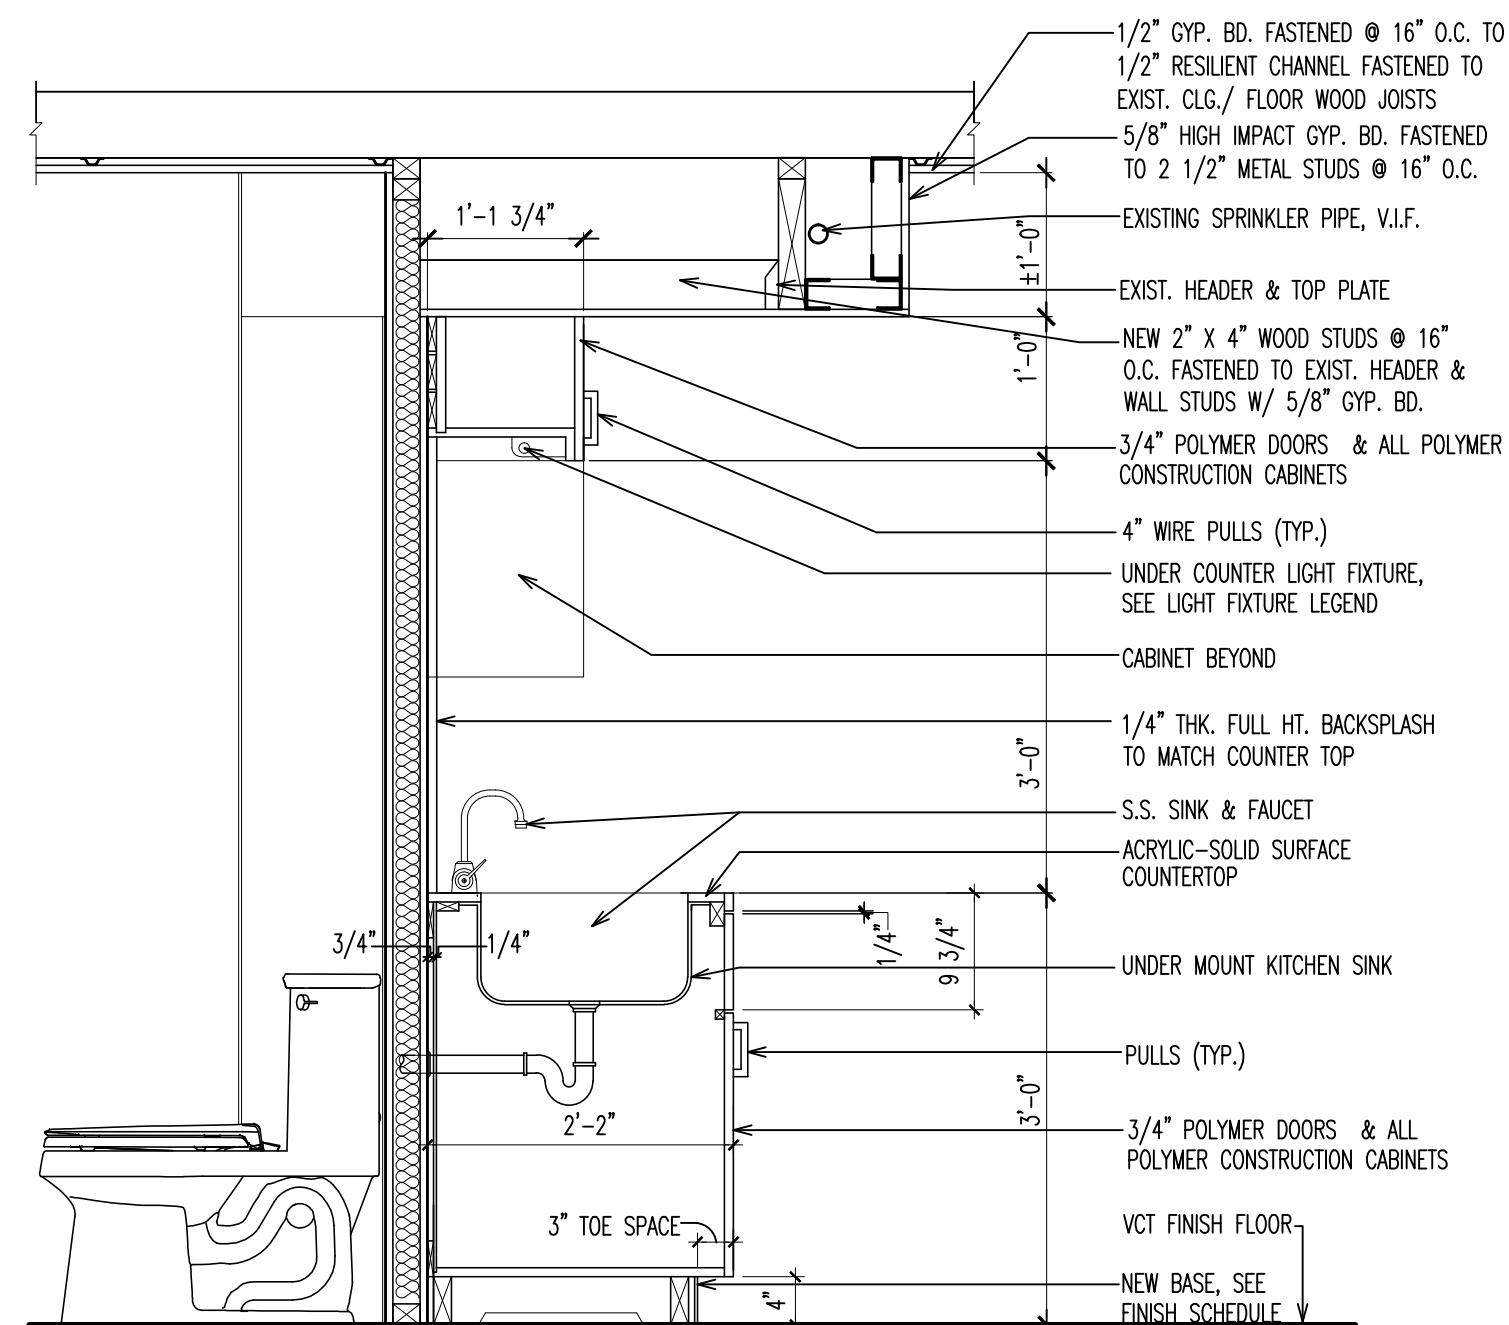


7 CABINET SECTION  
SCALE: 3/4" = 1'-0"

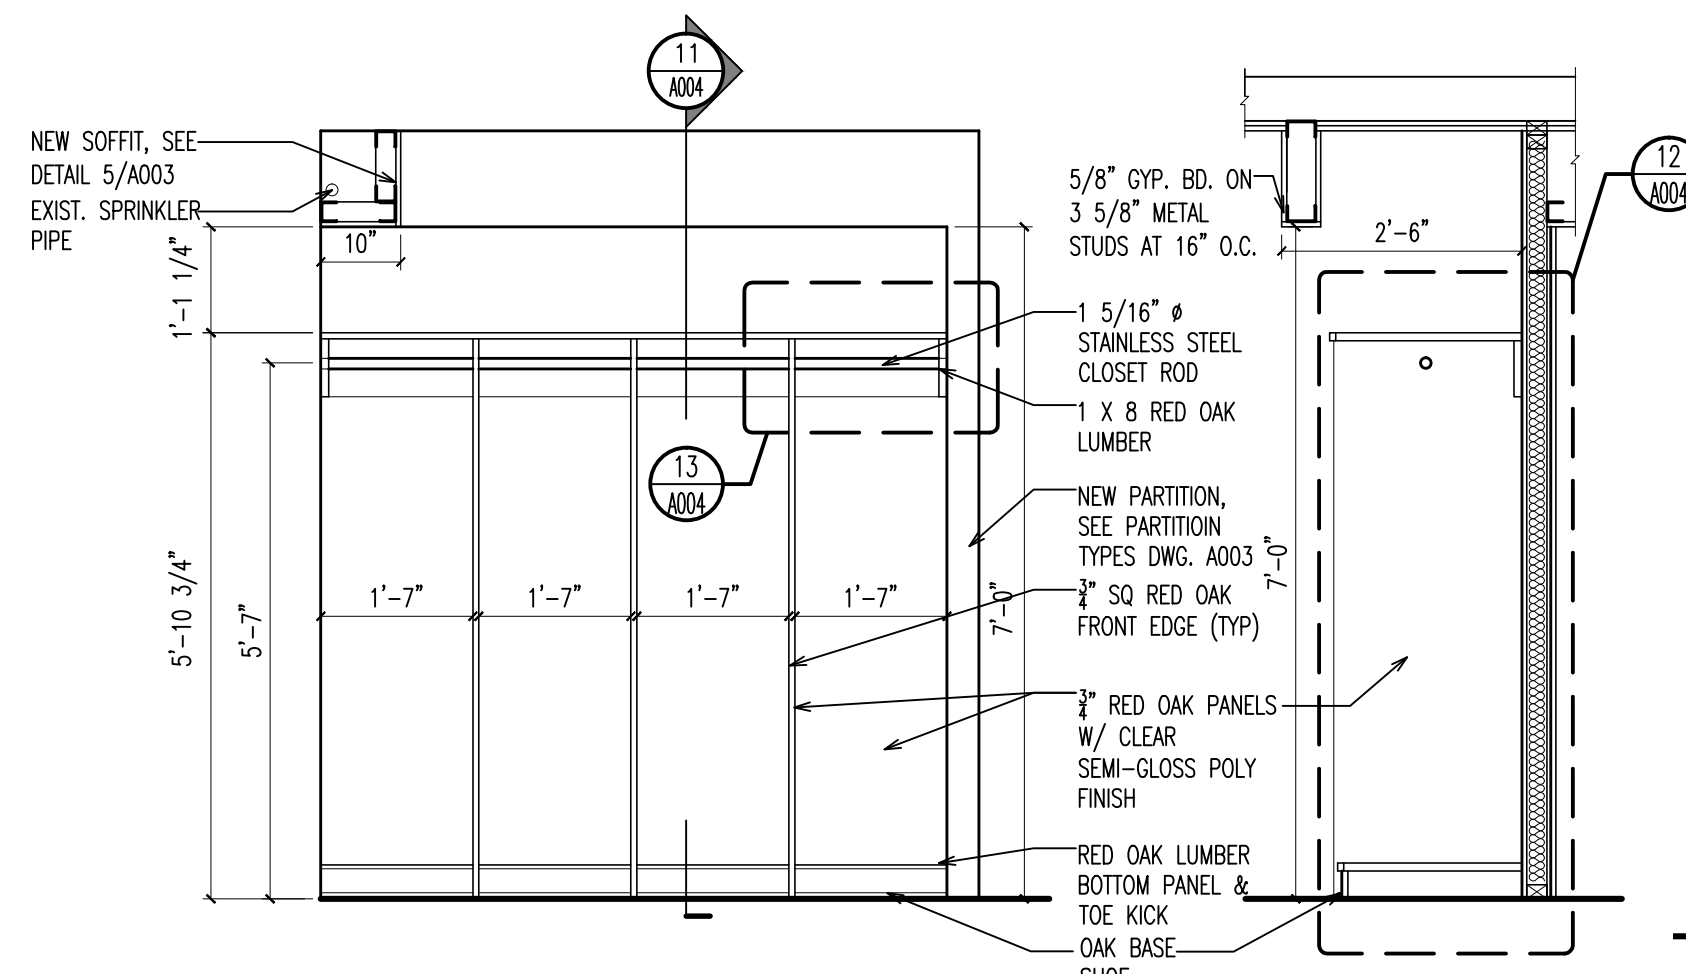


10 WARDROBE CLOSET ELEVATION  
SCALE: 1/2" = 1'-0"

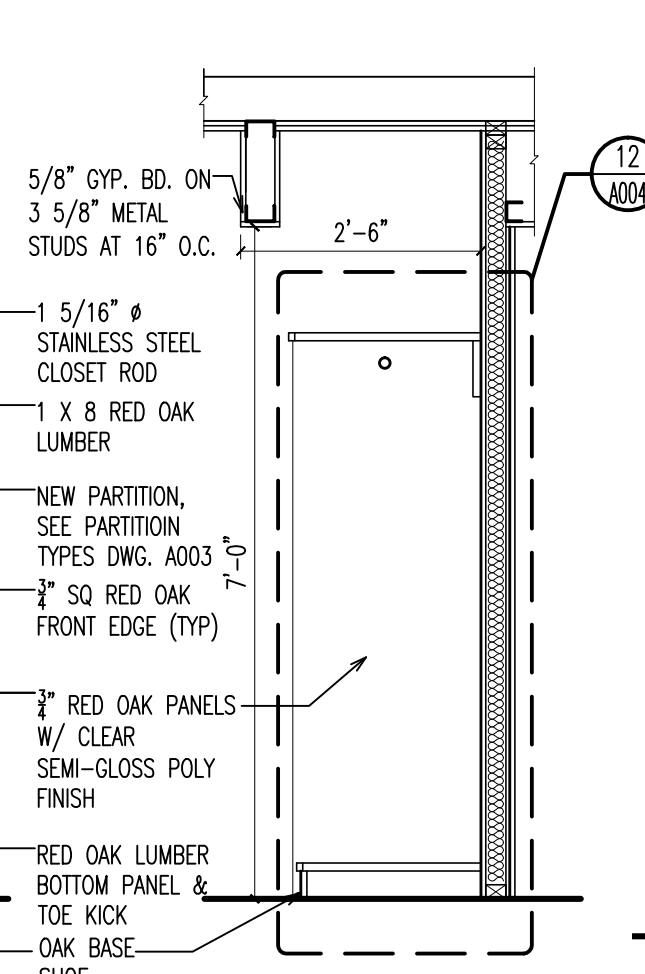


11 WARDROBE CLOSET SECTION  
SCALE: 1/2" = 1'-0"

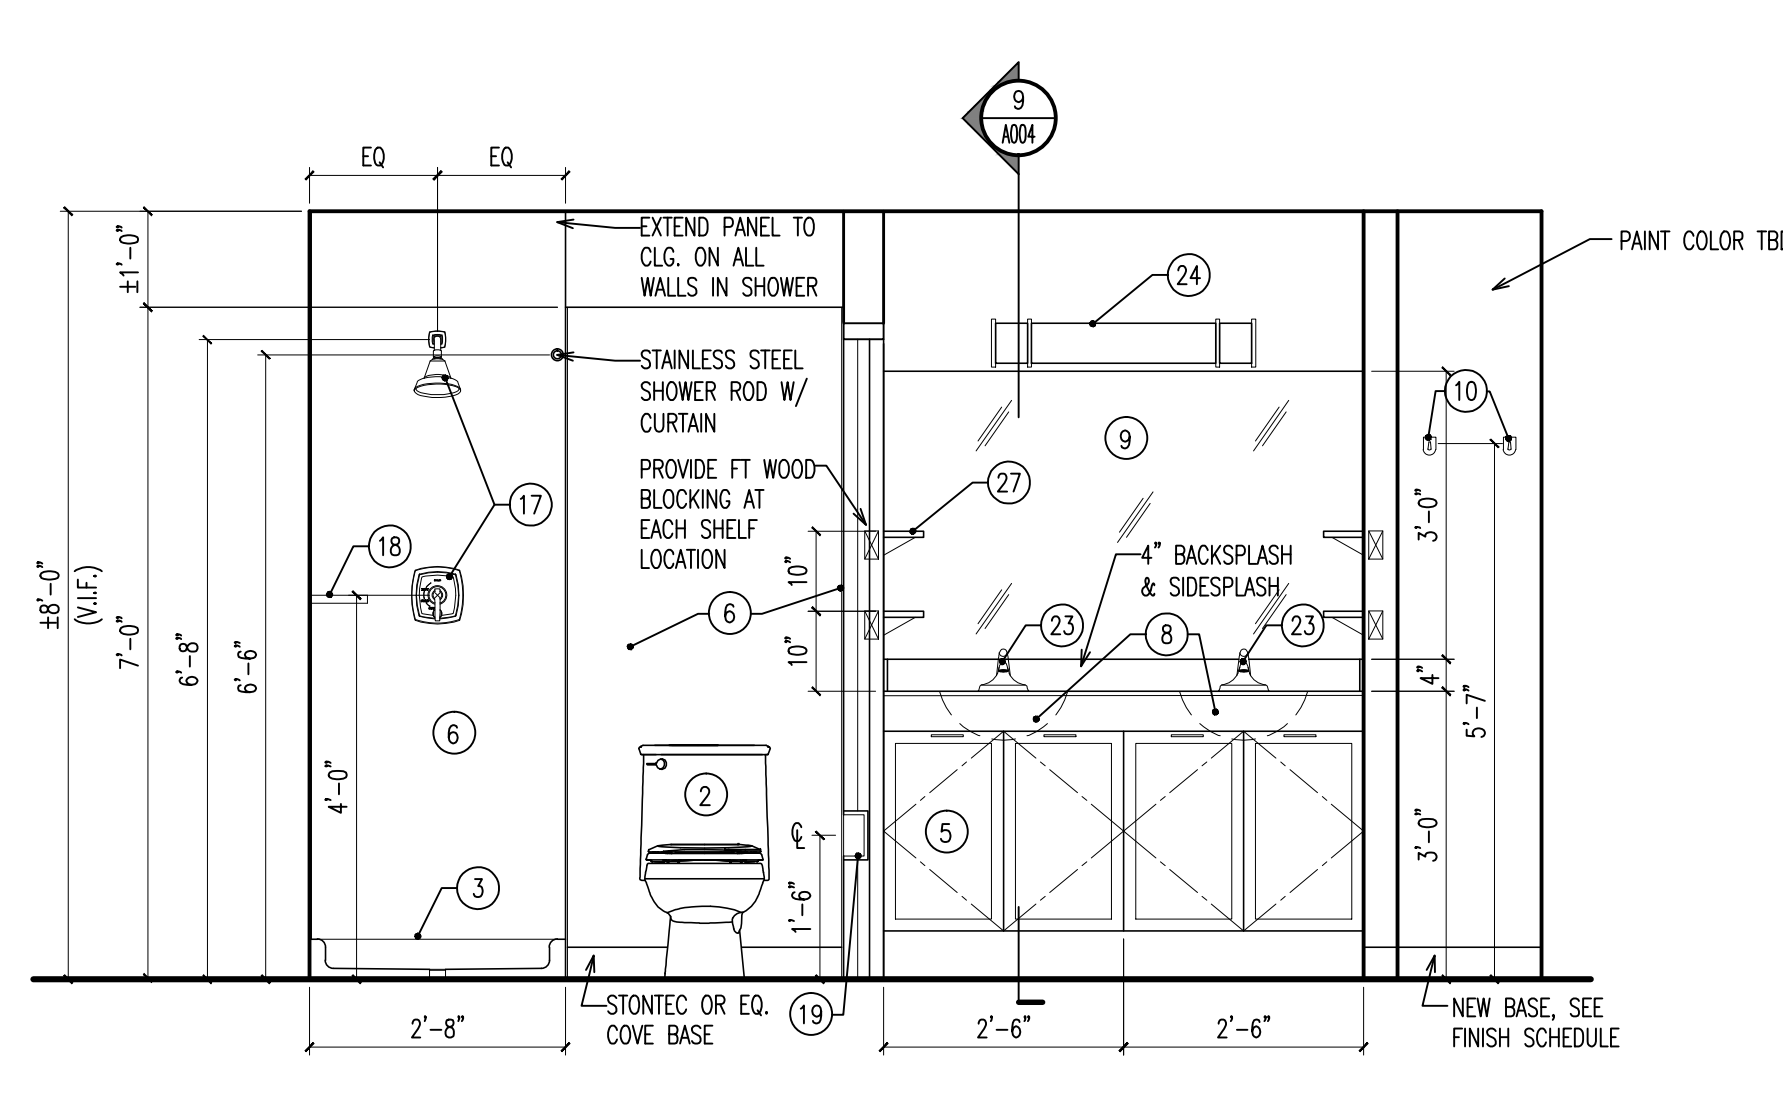


3 BATHROOM ELEVATIONS  
SCALE: 1/2" = 1'-0"

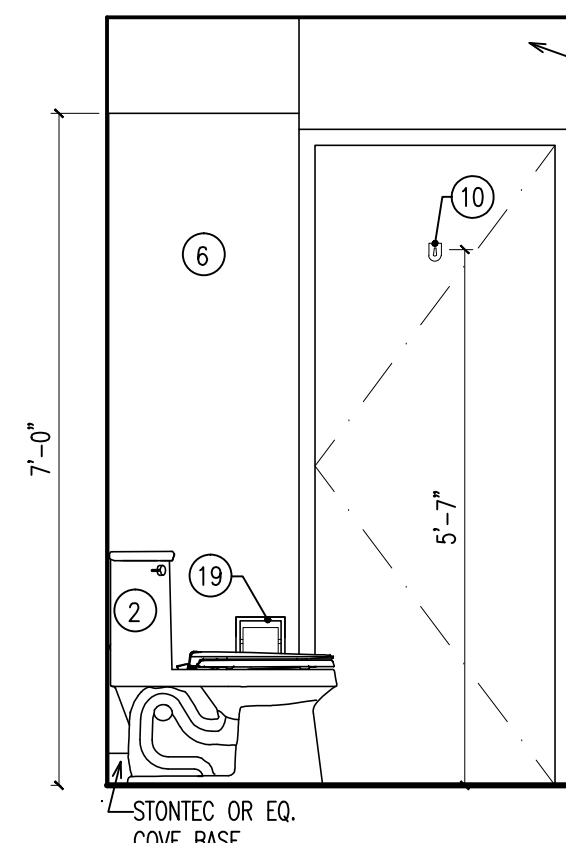


5 BATHROOM ELEVATIONS  
SCALE: 1/2" = 1'-0"

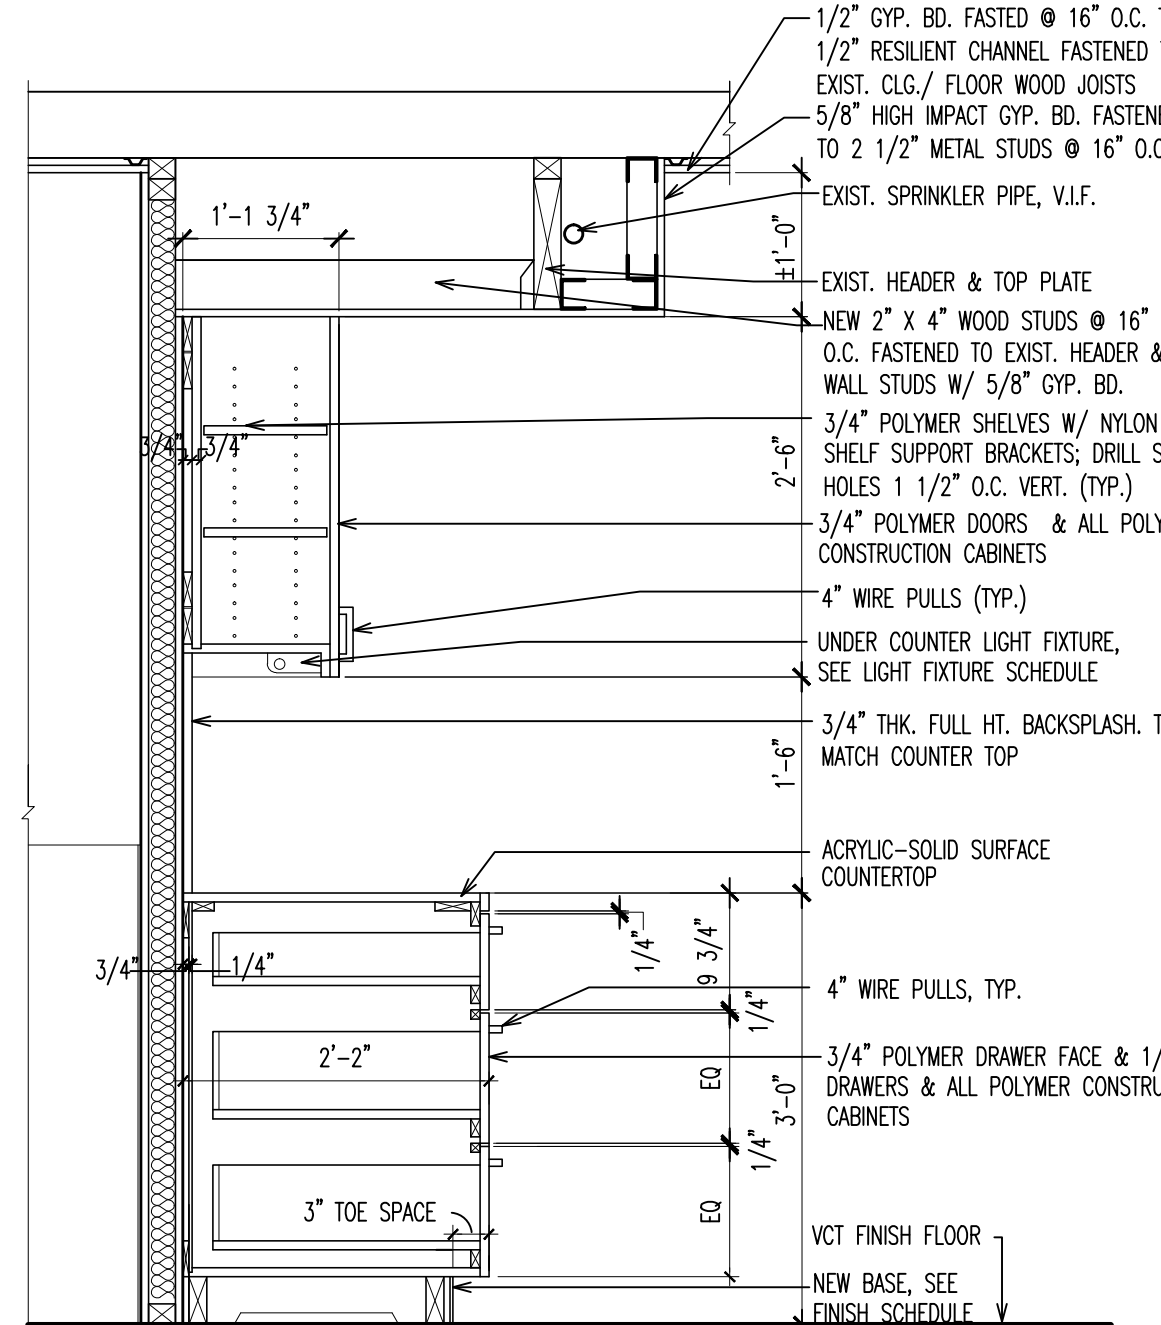


8 CABINET SECTION  
SCALE: 3/4" = 1'-0"

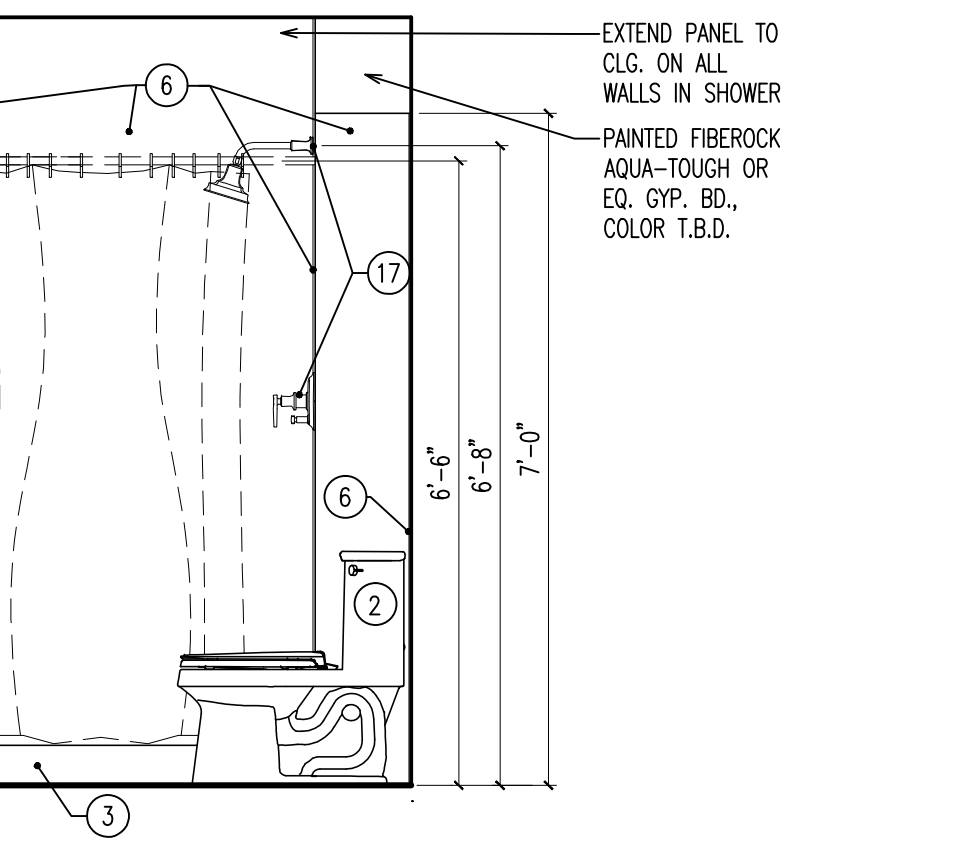


6 BATHROOM ELEVATIONS  
SCALE: 1/2" = 1'-0"

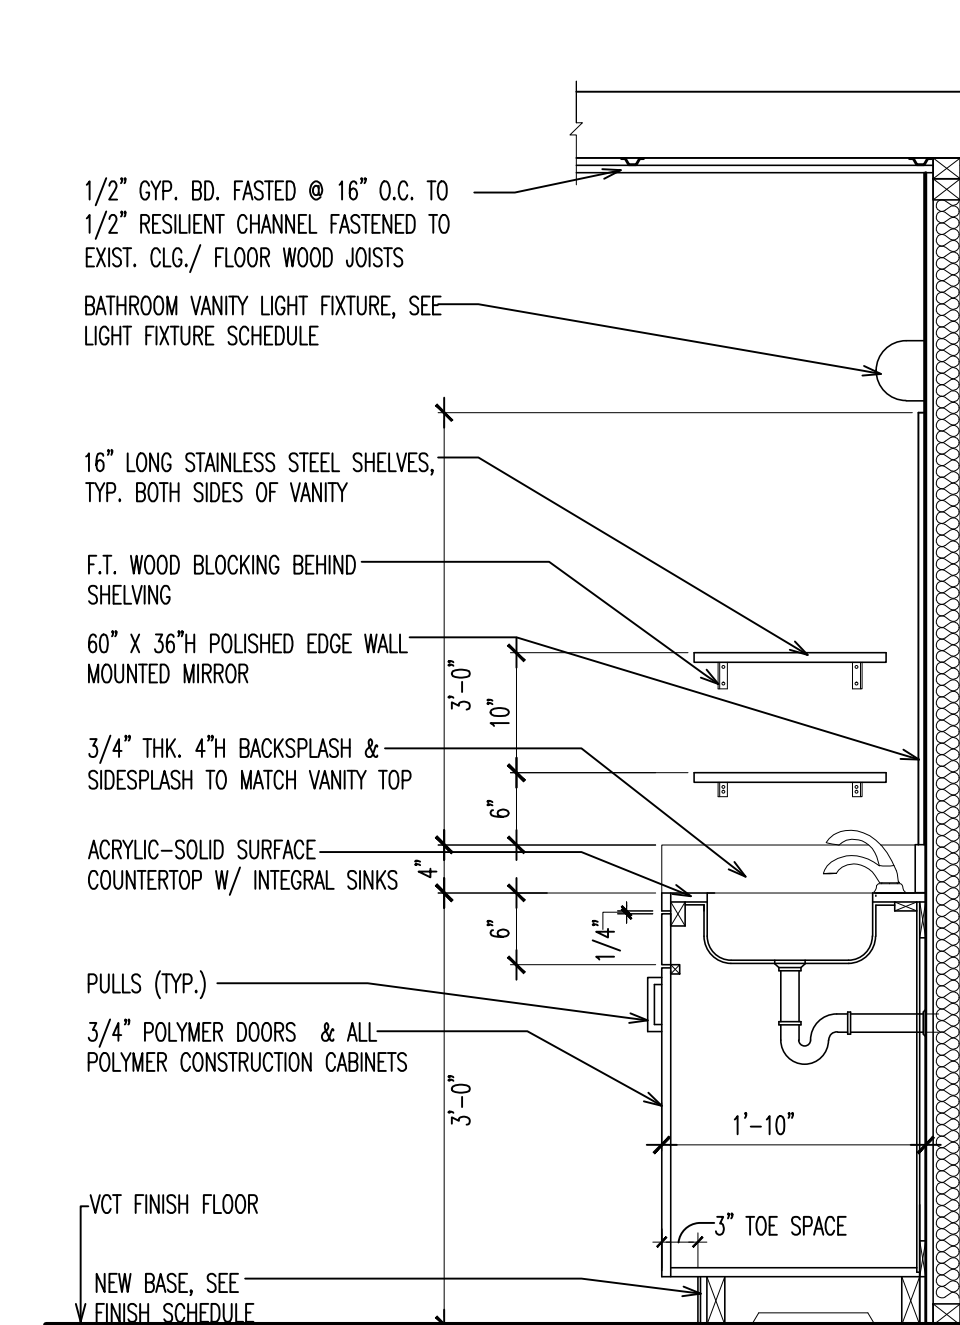

9 VANITY SECTION  
SCALE: 3/4" = 1'-0"

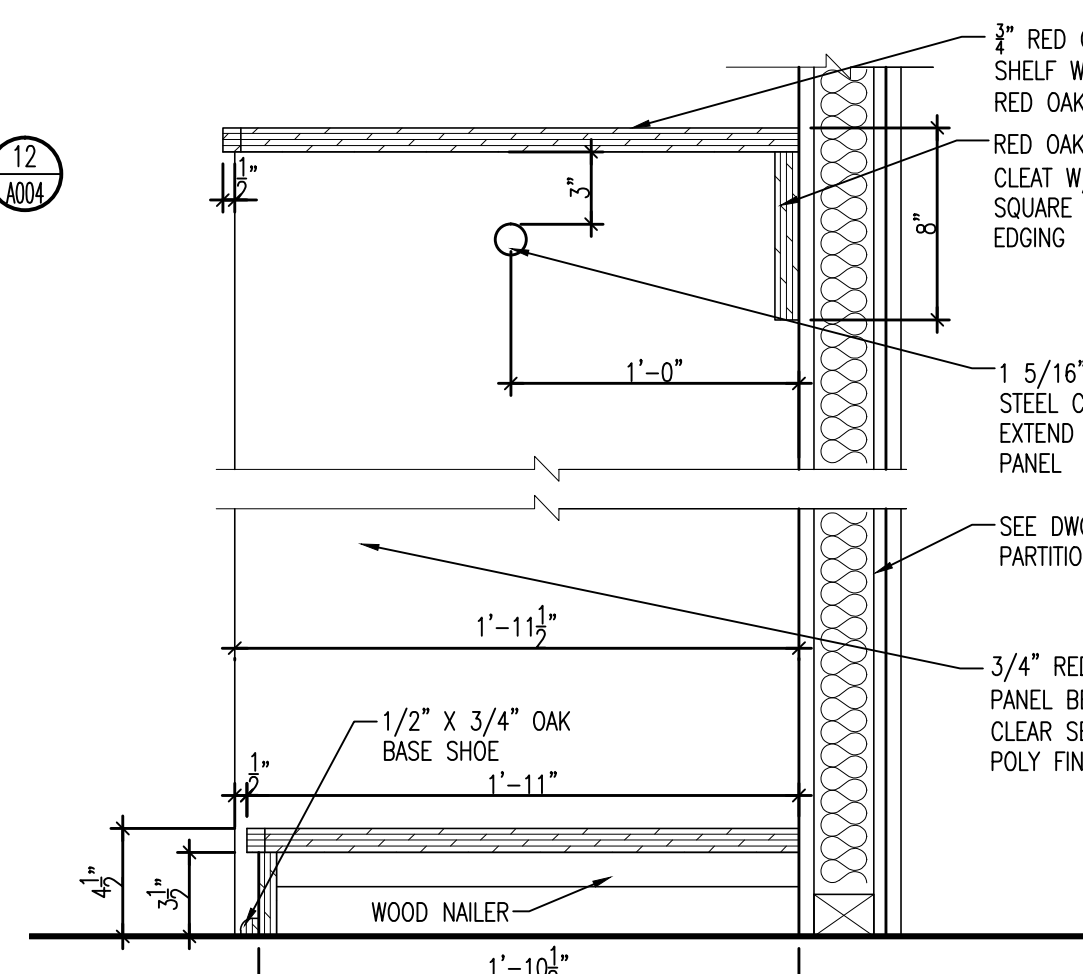


12 WARDROBE CLOSET SECTION DETAIL  
SCALE: 1 1/2" = 1'-0"

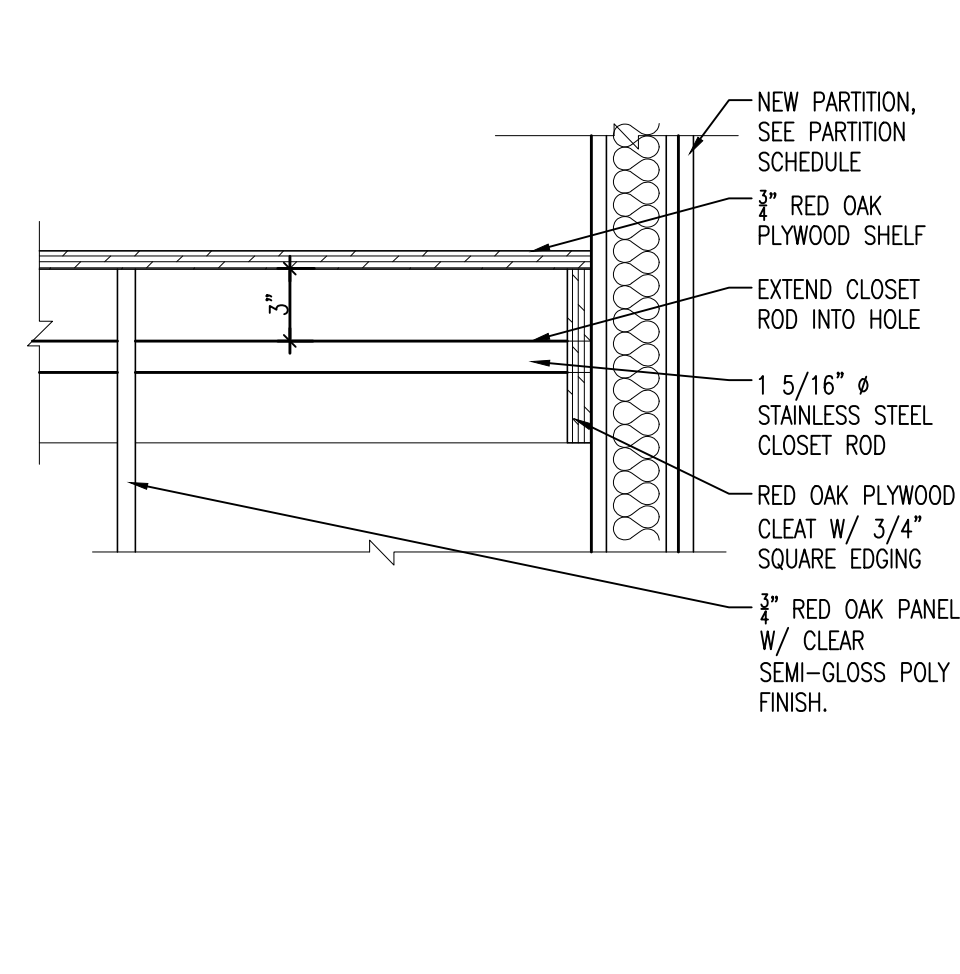

13 WARDROBE CLOSET ELEVATION DETAIL  
SCALE: 1 1/2" = 1'-0"

Revisions		
Date	Issue	Description
03-06-15	1	ISSUED FOR DCA FILING
03-18-15	1	ISSUED FOR BIDDING

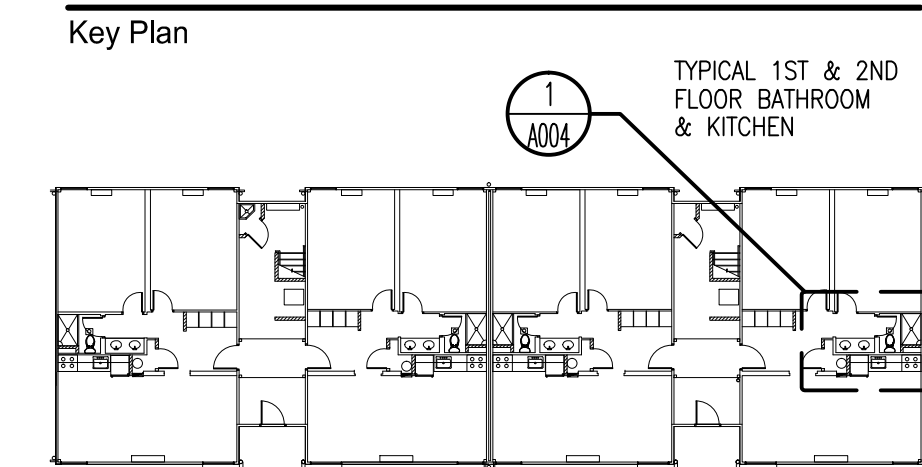

TYPICAL FLOOR

Consultants

**LEA**  
LINWOOD ENGINEERING  
ASSOCIATES, P.A.  
CONSULTING ENGINEERS  
955 Lincoln Avenue  
Glen Rock, New Jersey 07452  
TELEPHONE (201) 857-3998  
FAX: (201) 857-3994

Project

INTERIOR RENOVATIONS  
AT THE  
HOLLY-C RESIDENCE  
**RAMAPO**  
COLLEGE  
OF NEW JERSEY  
505 Ramapo Valley Road  
Mahwah, New Jersey 07430-1680

Client

**RAMAPO**  
COLLEGE  
OF NEW JERSEY  
505 Ramapo Valley Road  
Mahwah, New Jersey 07430-1680

**SNS** Architects & Engineers, PC  
1 PARAGON DRIVE . . . MONTVALE . . . NEW JERSEY. 07645  
TEL: 201.573.1767 FAX: 201.573.0808 www.sns-arch-eng.com

Fay W. Logan, AIA  
John M. Lignos, AIA  
Lorin J. Sonenshine, AIA  
Steven Napolitano, PE

Cert./Lic. No. AJ 109740  
Date 01-09-15 Scale AS NOTED  
Drawn By DP Checked By DP

Dwg. Title  
**ENLARGED PLAN, MILLWORK,  
DETAILS & EQUIP. SCHEDULE**

Work Order No. Dwg. No.

**4698C** **A004**