



1 ENLARGED TYPICAL KITCHEN & BATHROOM PLANS
SCALE: 1/2" = 1'-0"

NOTE:
AT ALL BATHROOMS FURNISH & INSTALL WATERPROOFING MEMBRANE BELOW FLOORING AND 4" UP WALLS. PROVIDE LATICRETE 9235 WATERPROOF MEMBRANE, SELF-CURING LIQUID RUBBER MEMBRANE, W/INTEGRAL REINFORCING FABRIC EXCEPT AT FIRST FLOORS, TYP.

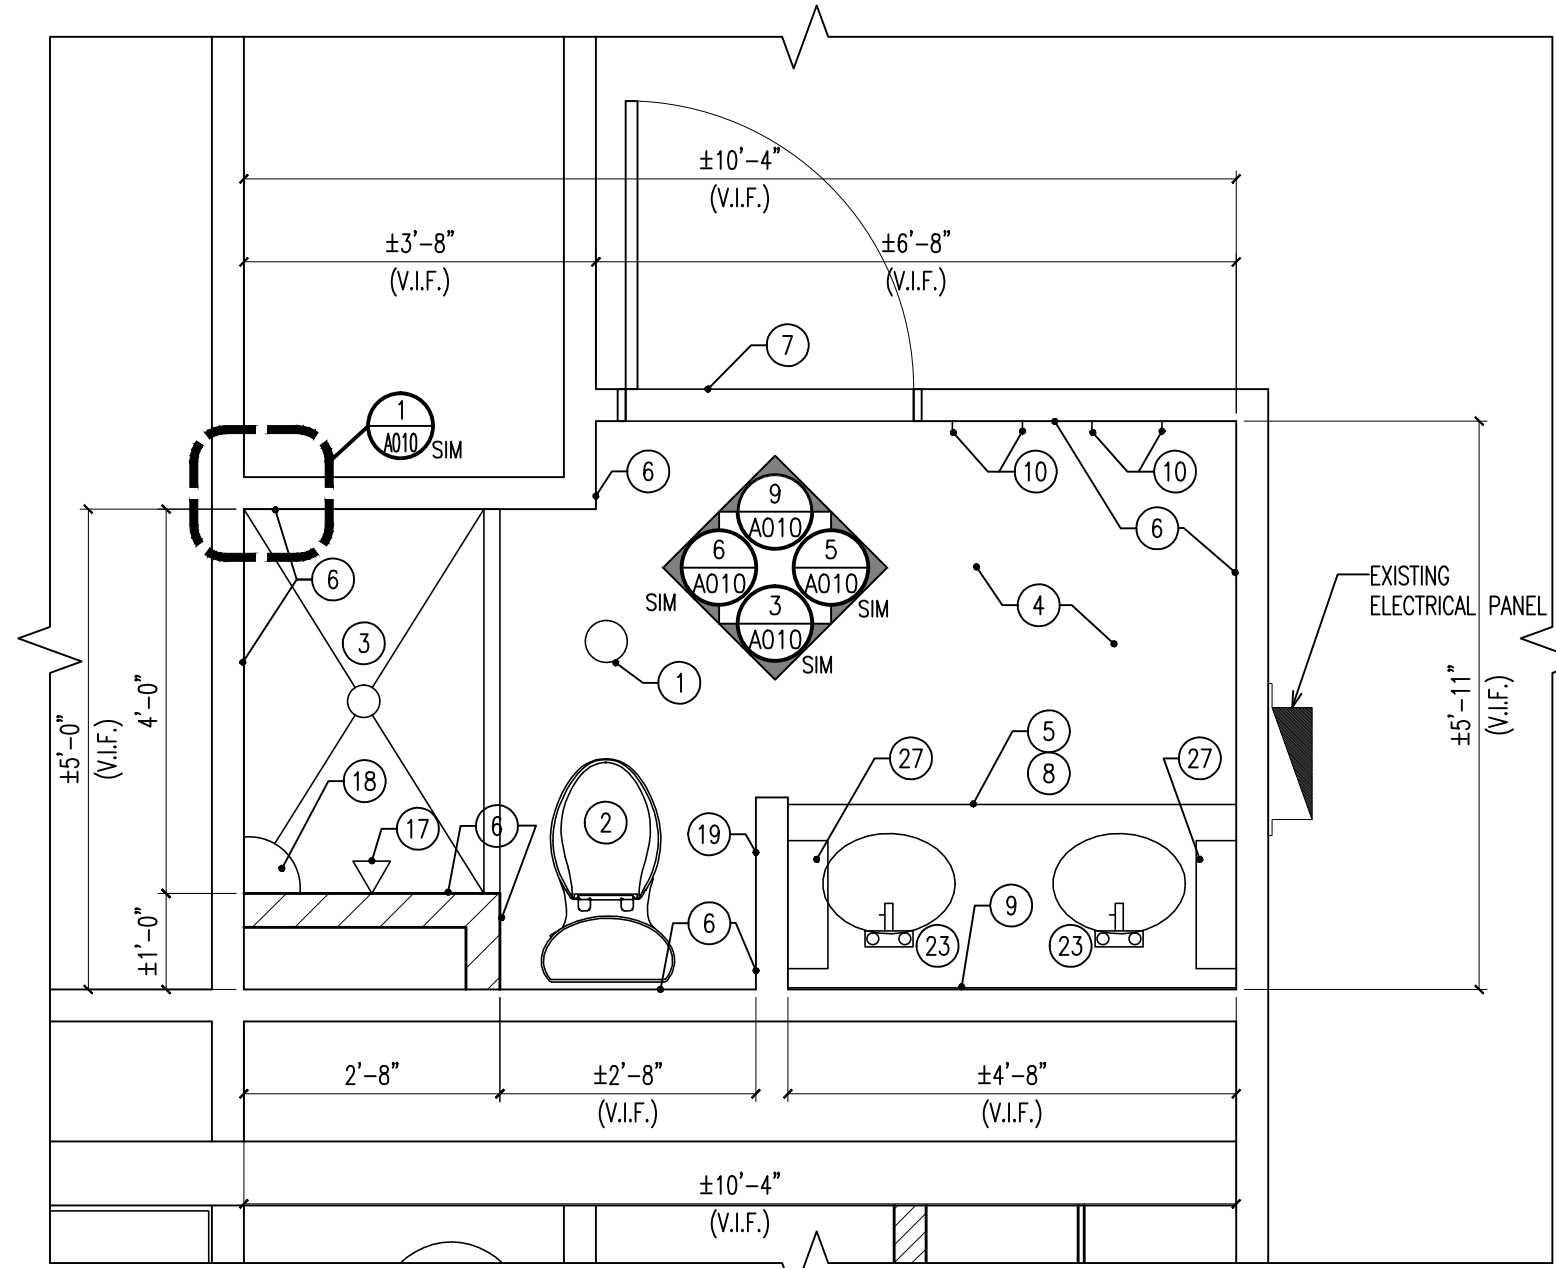


3 ENLARGED TYPICAL BATHROOM PLAN
SCALE: 1/2" = 1'-0"

NOTE:
AT ALL BATHROOMS FURNISH & INSTALL WATERPROOFING MEMBRANE BELOW FLOORING AND 4" UP WALLS. PROVIDE LATICRETE 9235 WATERPROOF MEMBRANE, SELF-CURING LIQUID RUBBER MEMBRANE, W/INTEGRAL REINFORCING FABRIC EXCEPT AT FIRST FLOORS, TYP.

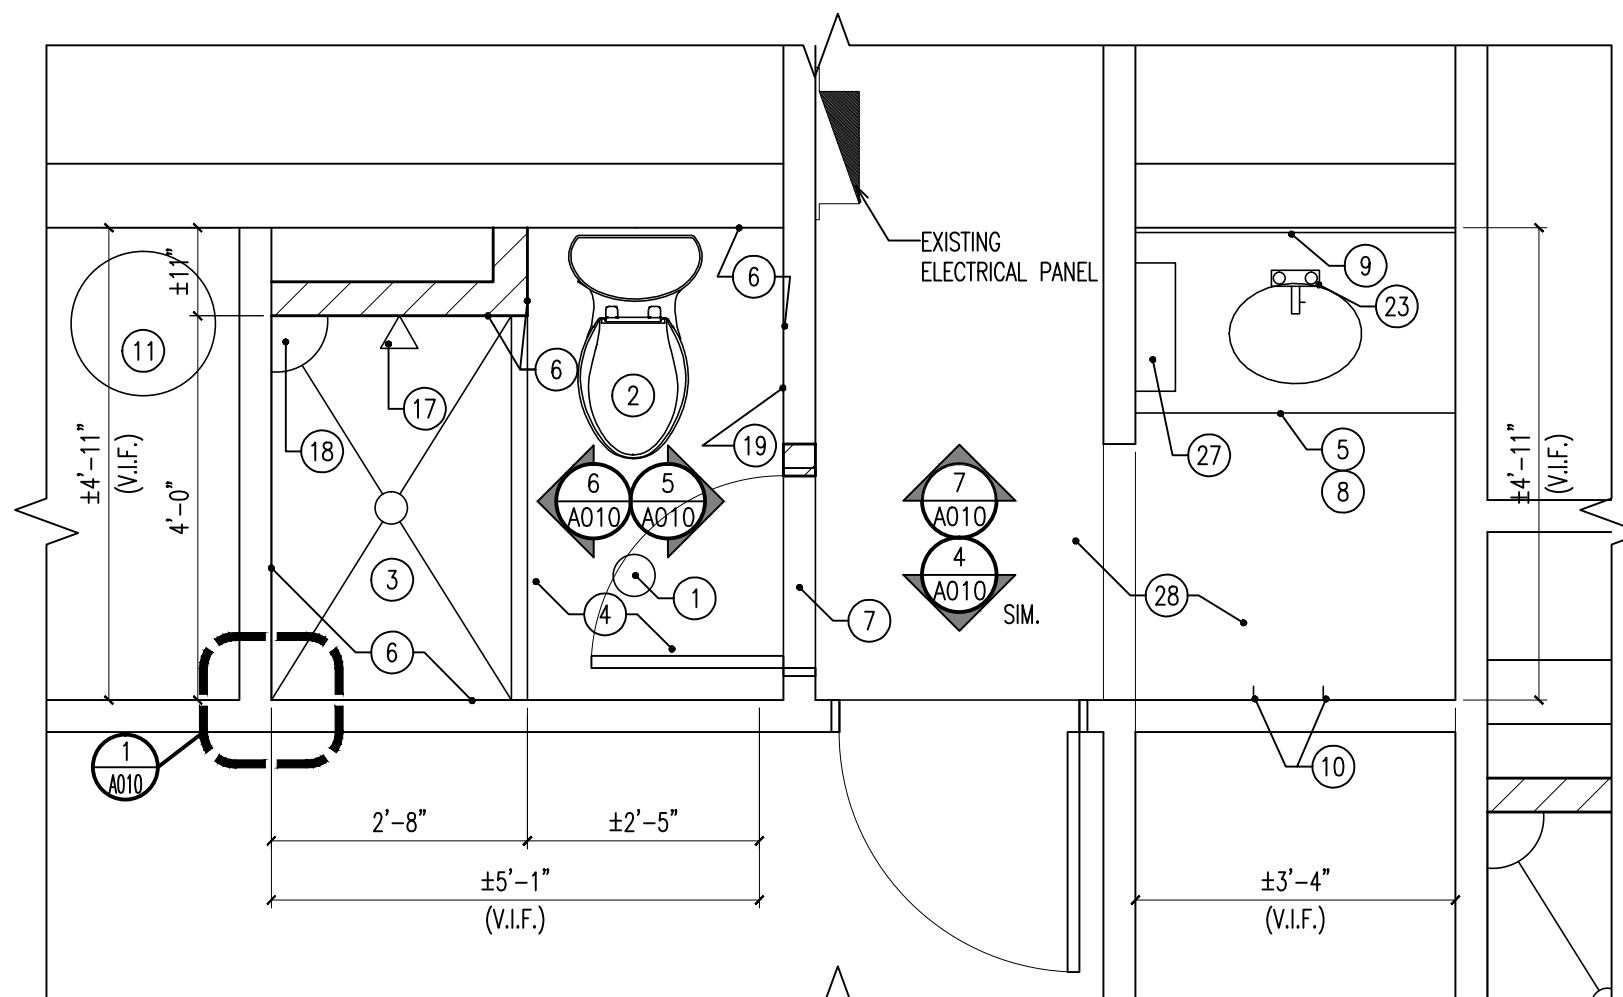

2 ENLARGED TYPICAL BATHROOM PLAN
SCALE: 1/2" = 1'-0"

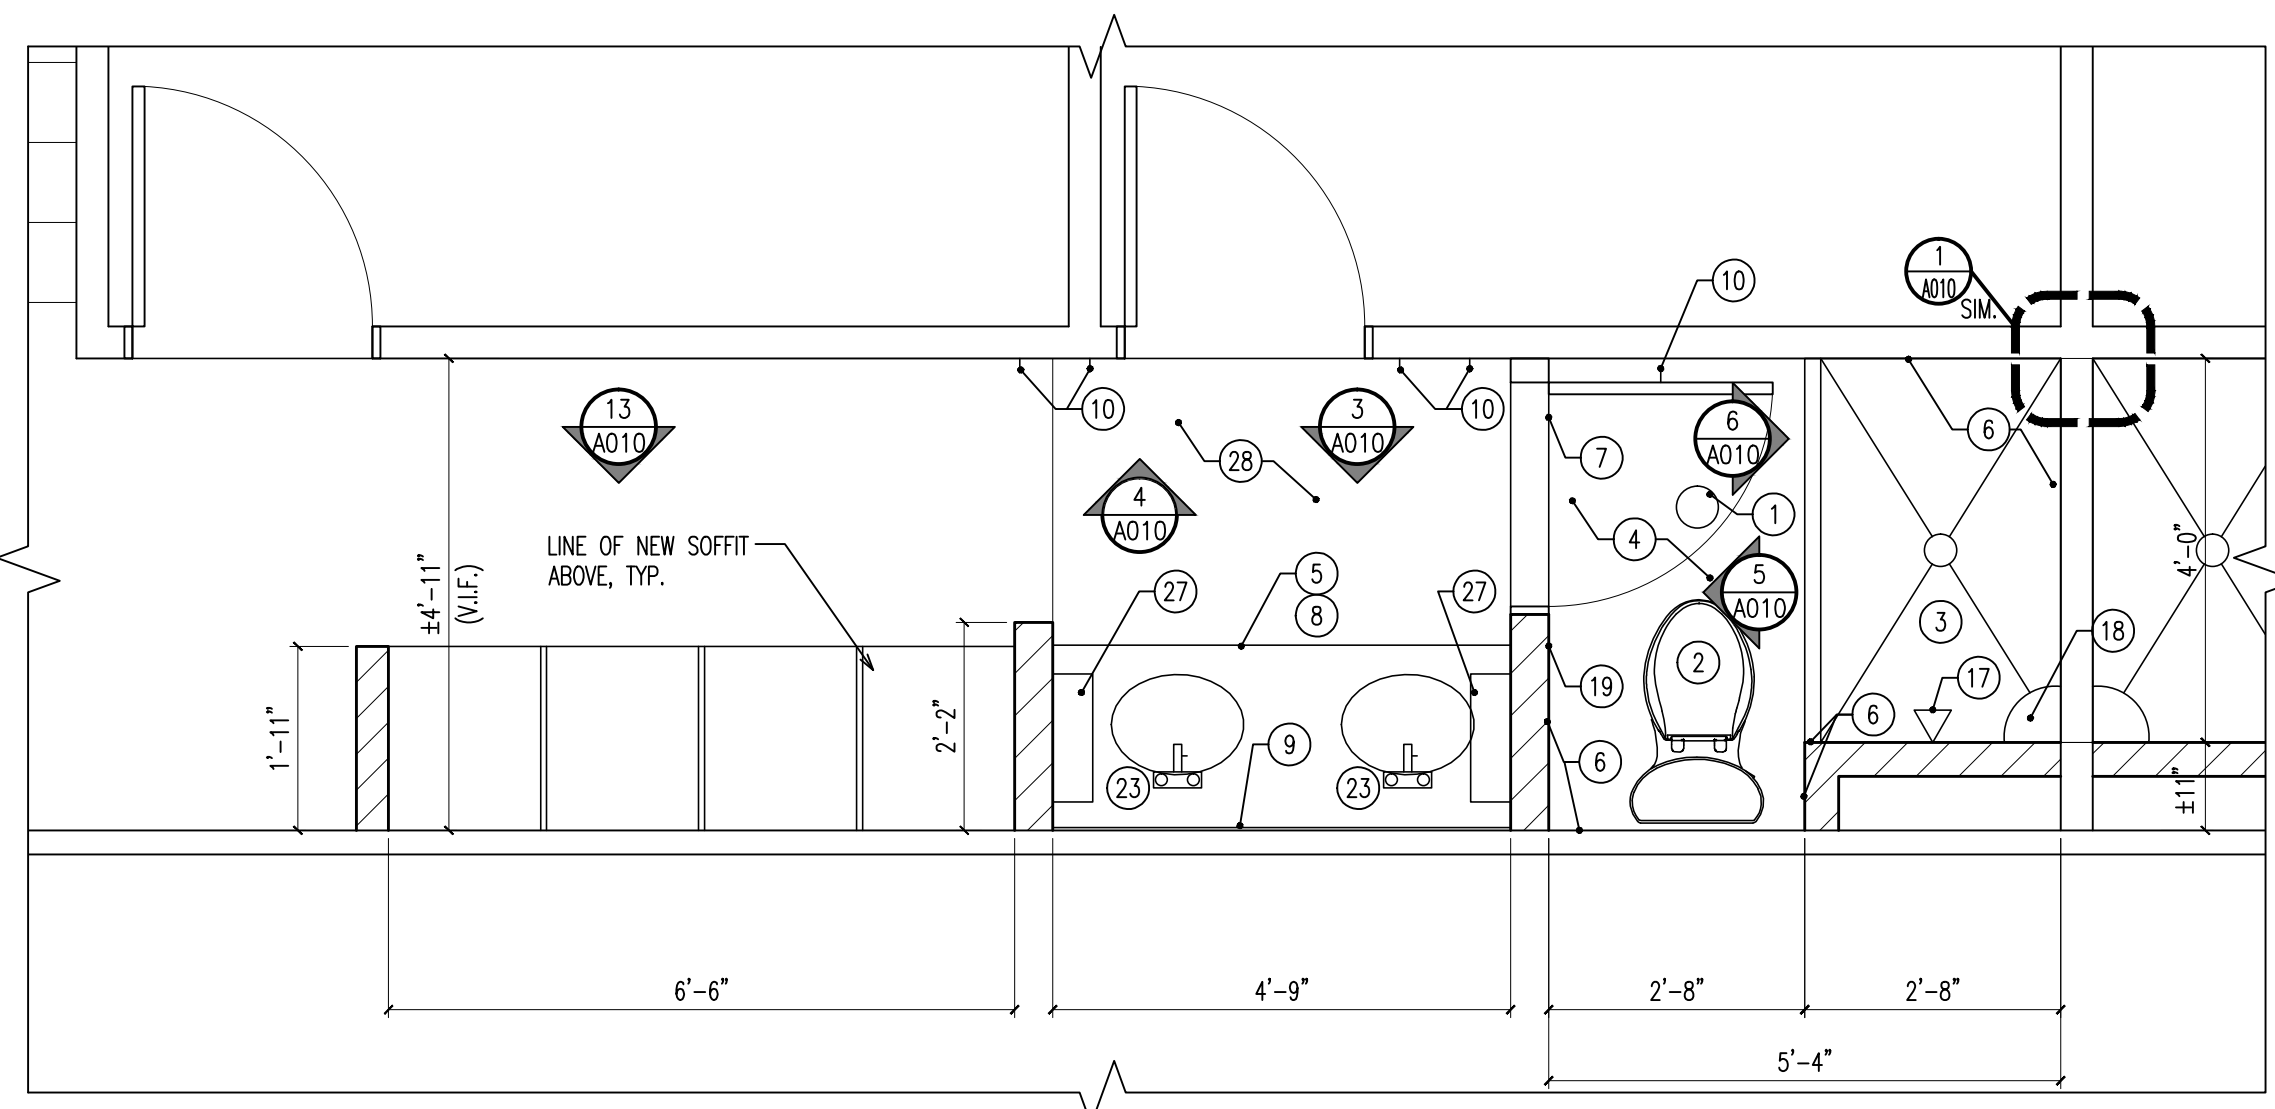

4 ENLARGED TYPICAL THIRD FLOOR BATHROOM PLAN
SCALE: 1/2" = 1'-0"

FINISH SCHEDULE

LOCATION	FLOOR	BASE	WALLS	CEILING	REMARKS
BEDROOM	CARPET TILE	PAINTED WOOD BASE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	INTERFACE OR EQ CARPET TILE, TYP.
LIVING/ DINING/ KITCHEN	CARPET TILE & LINOLEUM FLOORING	PAINTED WOOD BASE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	REFER TO FIRST & SECOND FLOOR PLANS FOR EXACT LOCATIONS OF CARPET & LINOLEUM FLOORING
HALL	CARPET TILE	PAINTED WOOD BASE & VINYL COVE AT BATHROOM SINK	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	
BATHROOM	STONETEC ERF STONEHARD OR EQUAL POLYMER FLOOR COATING	STONETEC ERF STONEHARD OR EQUAL POLYMER FLOOR COATING	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT & SOLID SURFACE PANELS	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	
CLOSET	CARPET TILE & LINOLEUM FLOORING	VINYL COVE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	THE CLOSET FLOOR FINISH IS TO MATCH THE FLOOR FINISH OUTSIDE THE CLOSET
STAIR	RUBBER TREADS ROPPE TREAD 31 OR EQUAL	PAINTED WOOD BASE	PAINTED GWB FLAT NEUTRAL COLOR PER ARCHITECT	PAINTED GWB FLAT WHITE COLOR PER ARCHITECT	

FINISH SCHEDULE NOTES:

- SUBMIT SAMPLES OF ALL MATERIALS SPECIFIED, FOR REVIEW AND APPROVAL BY SNS PRIOR TO ORDERING THE MATERIALS.
- ALL FINISHES TO BE PROVIDED AND INSTALLED BY GENERAL CONTRACTOR
- ALL SURFACES SHALL BE PREPARED TO RECEIVE NEW FINISHES (FLOOR, WALL, BASE) AS PER MANUFACTURER'S INSTRUCTIONS.
- REFER TO ELEVATIONS AND DETAILS FOR LOCATION OF NEW FINISHES.
- ALL FINISHES OCCUR IN THE LOCATIONS LISTED ABOVE AT ALL DORMITORIES AND SUPPORT SPACES ON ALL FLOORS.
- WINDOW CASING SHALL BE 'KUIKEN' KB120, BEADED COLONIAL CASING PRIMED FJ PINE, PAINTED WHITE.
- WOOD BASE SHALL BE 'KUIKEN' KB205, COLONIAL BASE MOLDING PRIMED FJ PINE, PAINTED WHITE.


EQUIPMENT SCHEDULE

MARK	DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
1	FLOOR DRAIN			REFER TO PLUMBING DRAWINGS. MOUNT FLUSH TO NEW FINISHED FLOORING
2	TOILET WITH SEAT COVER			REFER TO PLUMBING DRAWINGS
3	SHOWER BASE	VIGO	VG06049	32" X 48" COMPOSITE SHOWER PAN BASE W/ NEW DRAIN. PROVIDE NEW STAINLESS STEEL CURTAIN ROD & CURTAIN ABOVE.
4	POLYMER FLOOR COATING	STONHARD	STONETEC ERF	(POURED-IN-PLACE) WITH INTEGRAL COVE BASE WITH REGLET. INSTALL 1/4" HARDBACKER OR EQUAL UNDERLAMENT. REPLACE ANY DAMAGED WOOD FLOOR SHEATHING AS REQ'D.
5	BATHROOM VANITY CABINETS	WEREVER OUTDOOR PRODUCTS	SOLID MARINE GRADE POLYMER OUTDOOR CABINETRY	ALL POLYMER DOORS, DRAWERS & CABINET CONSTRUCTION. SEE ELEVATIONS FOR CONFIGURATIONS
6	SOLID WALL SURFACE PANEL	ARRAY	WALL PANEL	1/4" THICK PANEL, SEE ELEVATION FOR HEIGHT. COLOR TO BE SELECTED
7	MARBLE THRESHOLD	DALTILE	SINGLE HOLLYWOOD BEVEL	4" X 30" X 1/2"th
8	BATHROOM VANITY		VANITY TOP	SOLID SURFACE VANITY TOP W/ INTEGRAL SINGLE OR DOUBLE SINKS, SEE PLAN
9	MIRROR	STYLE SELECTIONS	36" HIGH POLISHED EDGE WALL MIRROR	SEE ELEVATIONS, MIRRORS ARE WALL TO WALL, VERIFY DIMENSIONS IN FIELD
10	TOWEL HOOK	MOEN	YB8003CH	SEE ELEVATIONS
11	WATER HEATER			REFER TO PLUMBING DRAWINGS
12	REFRIGERATOR	GE	GTS186TH	28" W X 67 1/2"th X 32 1/2"D
13	KITCHEN SINK			REFER TO MEP DRAWINGS
14	KITCHEN CABINETS	WEREVER OUTDOOR PRODUCTS	SOLID MARINE GRADE POLYMER OUTDOOR CABINETRY	ALL POLYMER DOORS, DRAWERS & CABINET CONSTRUCTION. SEE ELEVATIONS FOR CONFIGURATIONS
15	RANGE	GE	JBS600F	30" W X 47"th X 25 1/2"D
16	KITCHEN COUNTERTOP	LG HI-MACS	ACRYLIC-SOLID SURFACE	COLOR TO BE SELECTED IN PRICE GROUP 'B'
17	SHOWER HEAD AND CONTROLS			SEE PLUMBING DRAWINGS
18	CORNER SOAP DISH	ARRAY	C00707	7" X 7", FINISH TO MATCH SHOWER WALL PANELS
19	RECESSED TOILET TISSUE DISPENSER	BOBRICK	B-667	
20	MICROWAVE / HOOD	GE	JNM31600F	30"W X 16"H X 6"D. VERIFY PLACEMENT OF INTEGRAL RANGE VENT.
21	BATHROOM EXHAUST FAN	BROAN	679	120V, 2.0 AMP, 70 CFM W/ 4" DUCT. SEE ELECTRICAL DWG. FOR ADDTL. INFORMATION
22	KITCHEN SINK FAUCET			REFER TO PLUMBING DRAWINGS
23	BATHROOM FAUCET			REFER TO PLUMBING DRAWINGS
24	BATHROOM VANITY LIGHT FIXTURE			REFER TO ELECTRICAL DRAWINGS
25	UNDER CABINET LIGHT FIXTURE			REFER TO ELECTRICAL DRAWINGS
26	SEMI-RECESSED FIRE EXTINGUISHER CABINET W/ FIRE EXTINGUISHER	LARSEN'S	SS-2409-R1	STAINLESS STEEL CABINET W/ 5LBS FIRE EXTINGUISHER
27	STAINLESS STEEL SHELF	BOBRICK	B-295X16	16" LONG X 5" DEEP W/ (2) BRACKETS. PROVIDE WOOD BLOCKING & USE SS SHEET METAL SCREWS
28	LINOLEUM FLOORING	ARMSTRONG	2.5 MM-MARMORETTE	PROVIDE WELDED SEAMS, COLOR TO BE SELECTED FROM MANUFACTURERS FULL RANGE IN KITCHEN AREA

Revisions

Date	Issue	Description
06-03-15	1	ISSUED FOR CONSTRUCTION

Key Plan

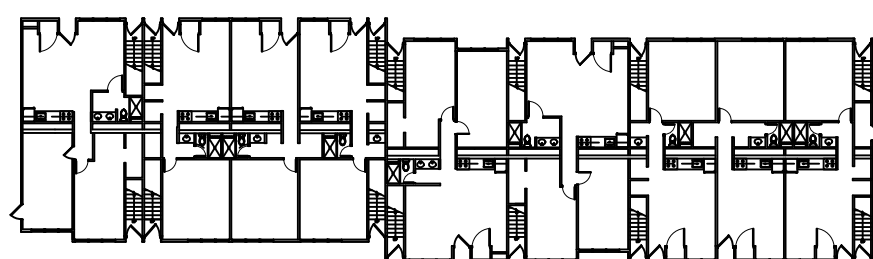

Consultants



LINWOOD ENGINEERING ASSOCIATES, P.A.
CONSULTING ENGINEERS
955 Lincoln Avenue
Glen Rock, New Jersey 07452
TELEPHONE (201) 857-3998
FAX: (201) 857-3994

Project

INTERIOR RENOVATIONS
AT THE
TAMARACK - N RESIDENCE

RAMAPO COLLEGE
OF NEW JERSEY
505 Ramapo Valley Road
Mahwah, New Jersey 07430-1680

DCA PROJECT#

Client

RAMAPO COLLEGE
OF NEW JERSEY
505 Ramapo Valley Road
Mahwah, New Jersey 07430-1680



1 PARAGON DRIVE . MONTVALE . NEW JERSEY 07645
TEL: 201.573.1767 FAX: 201.573.0808 www.sns-arch-eng.com

Fay W. Logan, AIA

John M. Lignos, AIA

Lorin J. Sonenshine, AIA

Steven Napolitano, PE

Cert./Lic. No. AI 109740

Date 01-09-15 Scale AS NOTED

Drawn By ABP Checked By MW

Dwg. Title

ENLARGED PLANS, FINISH & EQUIPMENT SCHEDULE

Work Order No.

Dwg. No.

4698N

A009