


**KEY NOTES (SAN. & DW PLAN)**

- ① NEW LAVATORY TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT AND DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM WALL ESCUTCHEON, TRAP WITH CLEANOUT, TAILPIECE, STOP VALVES, FLEX SUPPLIES AND FAUCETS FOR ALL LAVS AND ISOLATION KITS FOR ACCESSIBLE LAVS.
- ② NEW FLOOR MOUNTED WATER CLOSET TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT, DOMESTIC COLD WATER LINES, ETC. AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW 30" STAINLESS STEEL FLOOR FLANGE.
- ③ NEW SHOWER TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT AND DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM, TAILPIECE, STOP VALVES AND FAUCETS FOR ALL SHOWERS.
- ④ NEW KITCHEN SINK TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT AND DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM WALL ESCUTCHEON, TRAP WITH CLEANOUT, TAILPIECE, STOP VALVES, FLEX SUPPLIES AND FAUCET.
- ⑤ NEW HOT WATER HEATER TO BE INSTALLED. MODIFY EXISTING DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW WATER HEATER. PROVIDE NEW VALVES, EXPANSION TANK, RELIEF VALVES, ETC.
- ⑥ EXISTING FLOOR DRAIN TO REMAIN.
- ⑦ NEW FLOOR DRAIN TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT, DOMESTIC COLD WATER LINES, ETC. AS REQUIRED TO ALLOW FOR NEW FLOOR DRAIN. PROVIDE FLOOR DRAIN WITH NEW TRAP PRIMER.

**Revisions**

Date	Issue	Description
06-03-15	1	ISSUED FOR CONSTRUCTION
11-16-15	2	REVISED PER NJDOCA ELECTRONIC STAMP

**Key Plan**

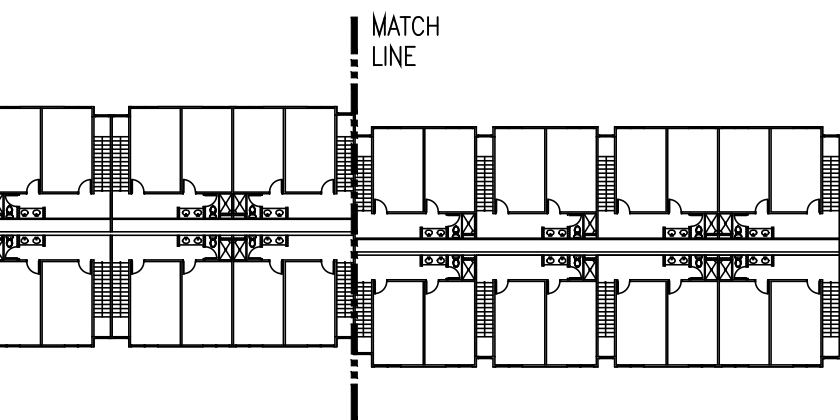

**Consultants**

**LINWOOD ENGINEERING ASSOCIATES, P.A.**

CONSULTING MECHANICAL & ELECTRICAL ENGINEERS

**LEA** 955 Lincoln Ave. 2301 Dupont Drive-Suite 150  
Glen Rock, New Jersey Irvine, California  
07452 92512  
t: 201.857.3998 t: 714.424.0001  
f: 201.857.3994 f: 714.424.0004  
www.linwoodengineering.com

**Project**

INTERIOR RENOVATIONS  
AT THE  
TAMARACK - N RESIDENCE

**RAMAPO COLLEGE**  
OF NEW JERSEY  
505 Ramapo Valley Road  
Mahwah, New Jersey 07430-1680

**Client**

**RAMAPO COLLEGE**  
OF NEW JERSEY  
505 Ramapo Valley Road  
Mahwah, New Jersey 07430-1680

**SNS** Architects & Engineers, PC  
1 PARAGON DRIVE . MONTVALE . NEW JERSEY . 07645  
tel: 201.573.1767 fax: 201.573.0808 www.sns-arch-eng.com

Fay W. Logan, AIA ☐  
John M. Lignos, AIA ☐  
Lorin J. Sonenshine, AIA ☐  
Steven Napolitano, PE ☐

Cert./Lic. No.   
Date 04-10-15 Scale AS NOTED  
Drawn By MD Checked By SG  
Dwg. Title  
THIRD FLOOR SANITARY PLAN

Work Order No. Dwg. No.

4698N P202

MATCH  
LINE

**THIRD FLOOR SANITARY PLAN**

SCALE: 1/4"=1'-0"

**Michael T. Davina, P.E.**  
NJ #48654  
CT #0025779

**Robert J. Hatch, P.E.**  
AR #13868  
CA #E16118  
CT #15318  
FL #69560  
MA #48516  
NJ #55419  
NV #019975  
NY #56608  
PA #036014-E