

MATCH
LINE


KEY NOTES:

- EXISTING PACKAGED VERTICAL A/C UNIT.
- NEW EXHAUST FAN MANUFACTURED BY BROWN MODEL 801F TO CONNECT TO EXISTING DUCT RISER WITH 4" DUCT. VERIFY EXISTING LOCATION OF DUCT RISER IN FIELD.
- SEAL ALL JOINTS IN EXISTING TOILET AND KITCHEN EXHAUST DUCT RISER WITH NEW MASTIC.
- NEW 10"x3-1/4" DUCT TRANSITION TO 6" TO RUN IN CEILING TO CONNECT TO EXISTING EXHAUST DUCT RISER. VERIFY EXISTING LOCATION OF DUCT RISER IN FIELD.
- NEW SUPPLY GRILLE MANUFACTURED BY TITUS MODEL "500N" OR APPROVED EQUAL. NEW GRILLE NECK AND FRAME SIZE TO MATCH EXISTING.
- RE-INSTALL EXISTING THERMOSTAT/TEMPERATURE SENSOR. REPLACE AS REQUIRED IF DAMAGED DURING CONSTRUCTION (TYP).
- EXISTING SUPPLY GRILLE TO REMAIN.

Revisions

Date	Issue	Description
06-03-15	1	ISSUED FOR CONSTRUCTION
11-16-15	2	REVISED PER NJDOCA ELECTRONIC STAMP

Key Plan

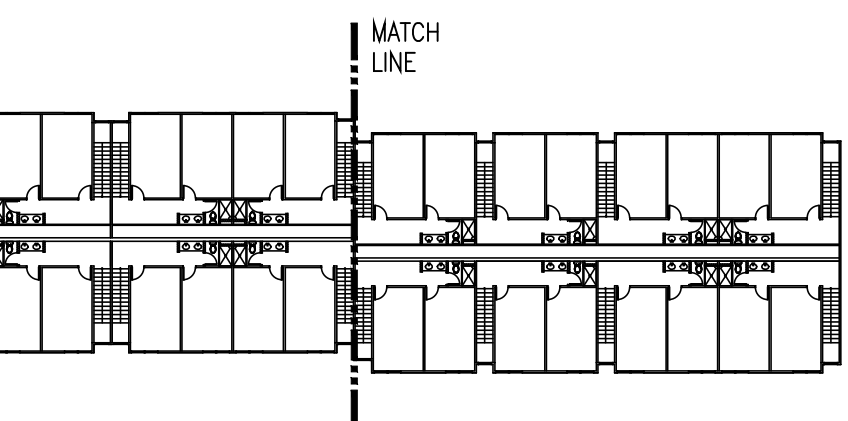

Consultants

LINWOOD ENGINEERING ASSOCIATES, P.A.

CONSULTING MECHANICAL & ELECTRICAL ENGINEERS

LEA 955 Lincoln Ave. 2301 Dupont Drive-Suite 150
Glen Rock, New Jersey Irvine, California
07452 92512
t: 201.857.3998 f: 714.424.0001
f: 201.857.3994 t: 714.424.0004
www.linwoodengineering.com

Project

INTERIOR RENOVATIONS
AT THE
TAMARACK - N RESIDENCE




Client



SNS Architects & Engineers, PC

1 PARAGON DRIVE . MONTVALE . NEW JERSEY . 07645
tel: 201.573.1767 fax: 201.573.0808 www.sns-arch-eng.com

- Fay W. Logan, AIA ☐
- John M. Lignos, AIA ☐
- Lorin J. Sonenshine, AIA ☐
- Steven Napolitano, PE ☐



Cert./Lic. No. _____
Date 04-10-15 Scale AS NOTED
Drawn By MD Checked By sg
Dwg. Title
THIRD FLOOR HVAC PLAN

Work Order No. _____ Dwg. No. _____

4698N M202

MATCH
LINE

THIRD FLOOR HVAC PLAN
SCALE: 1/4"=1'-0"

Michael T. Davina, P.E.
NJ #48654
CT #0025779

Robert J. Hatch, P.E.
AR #13868
CA #E16118
CT #15318
FL #69560
MA #48516
NJ #35419
NV #019975
NY #56608
PA #036014-E