


MATCH
LINE

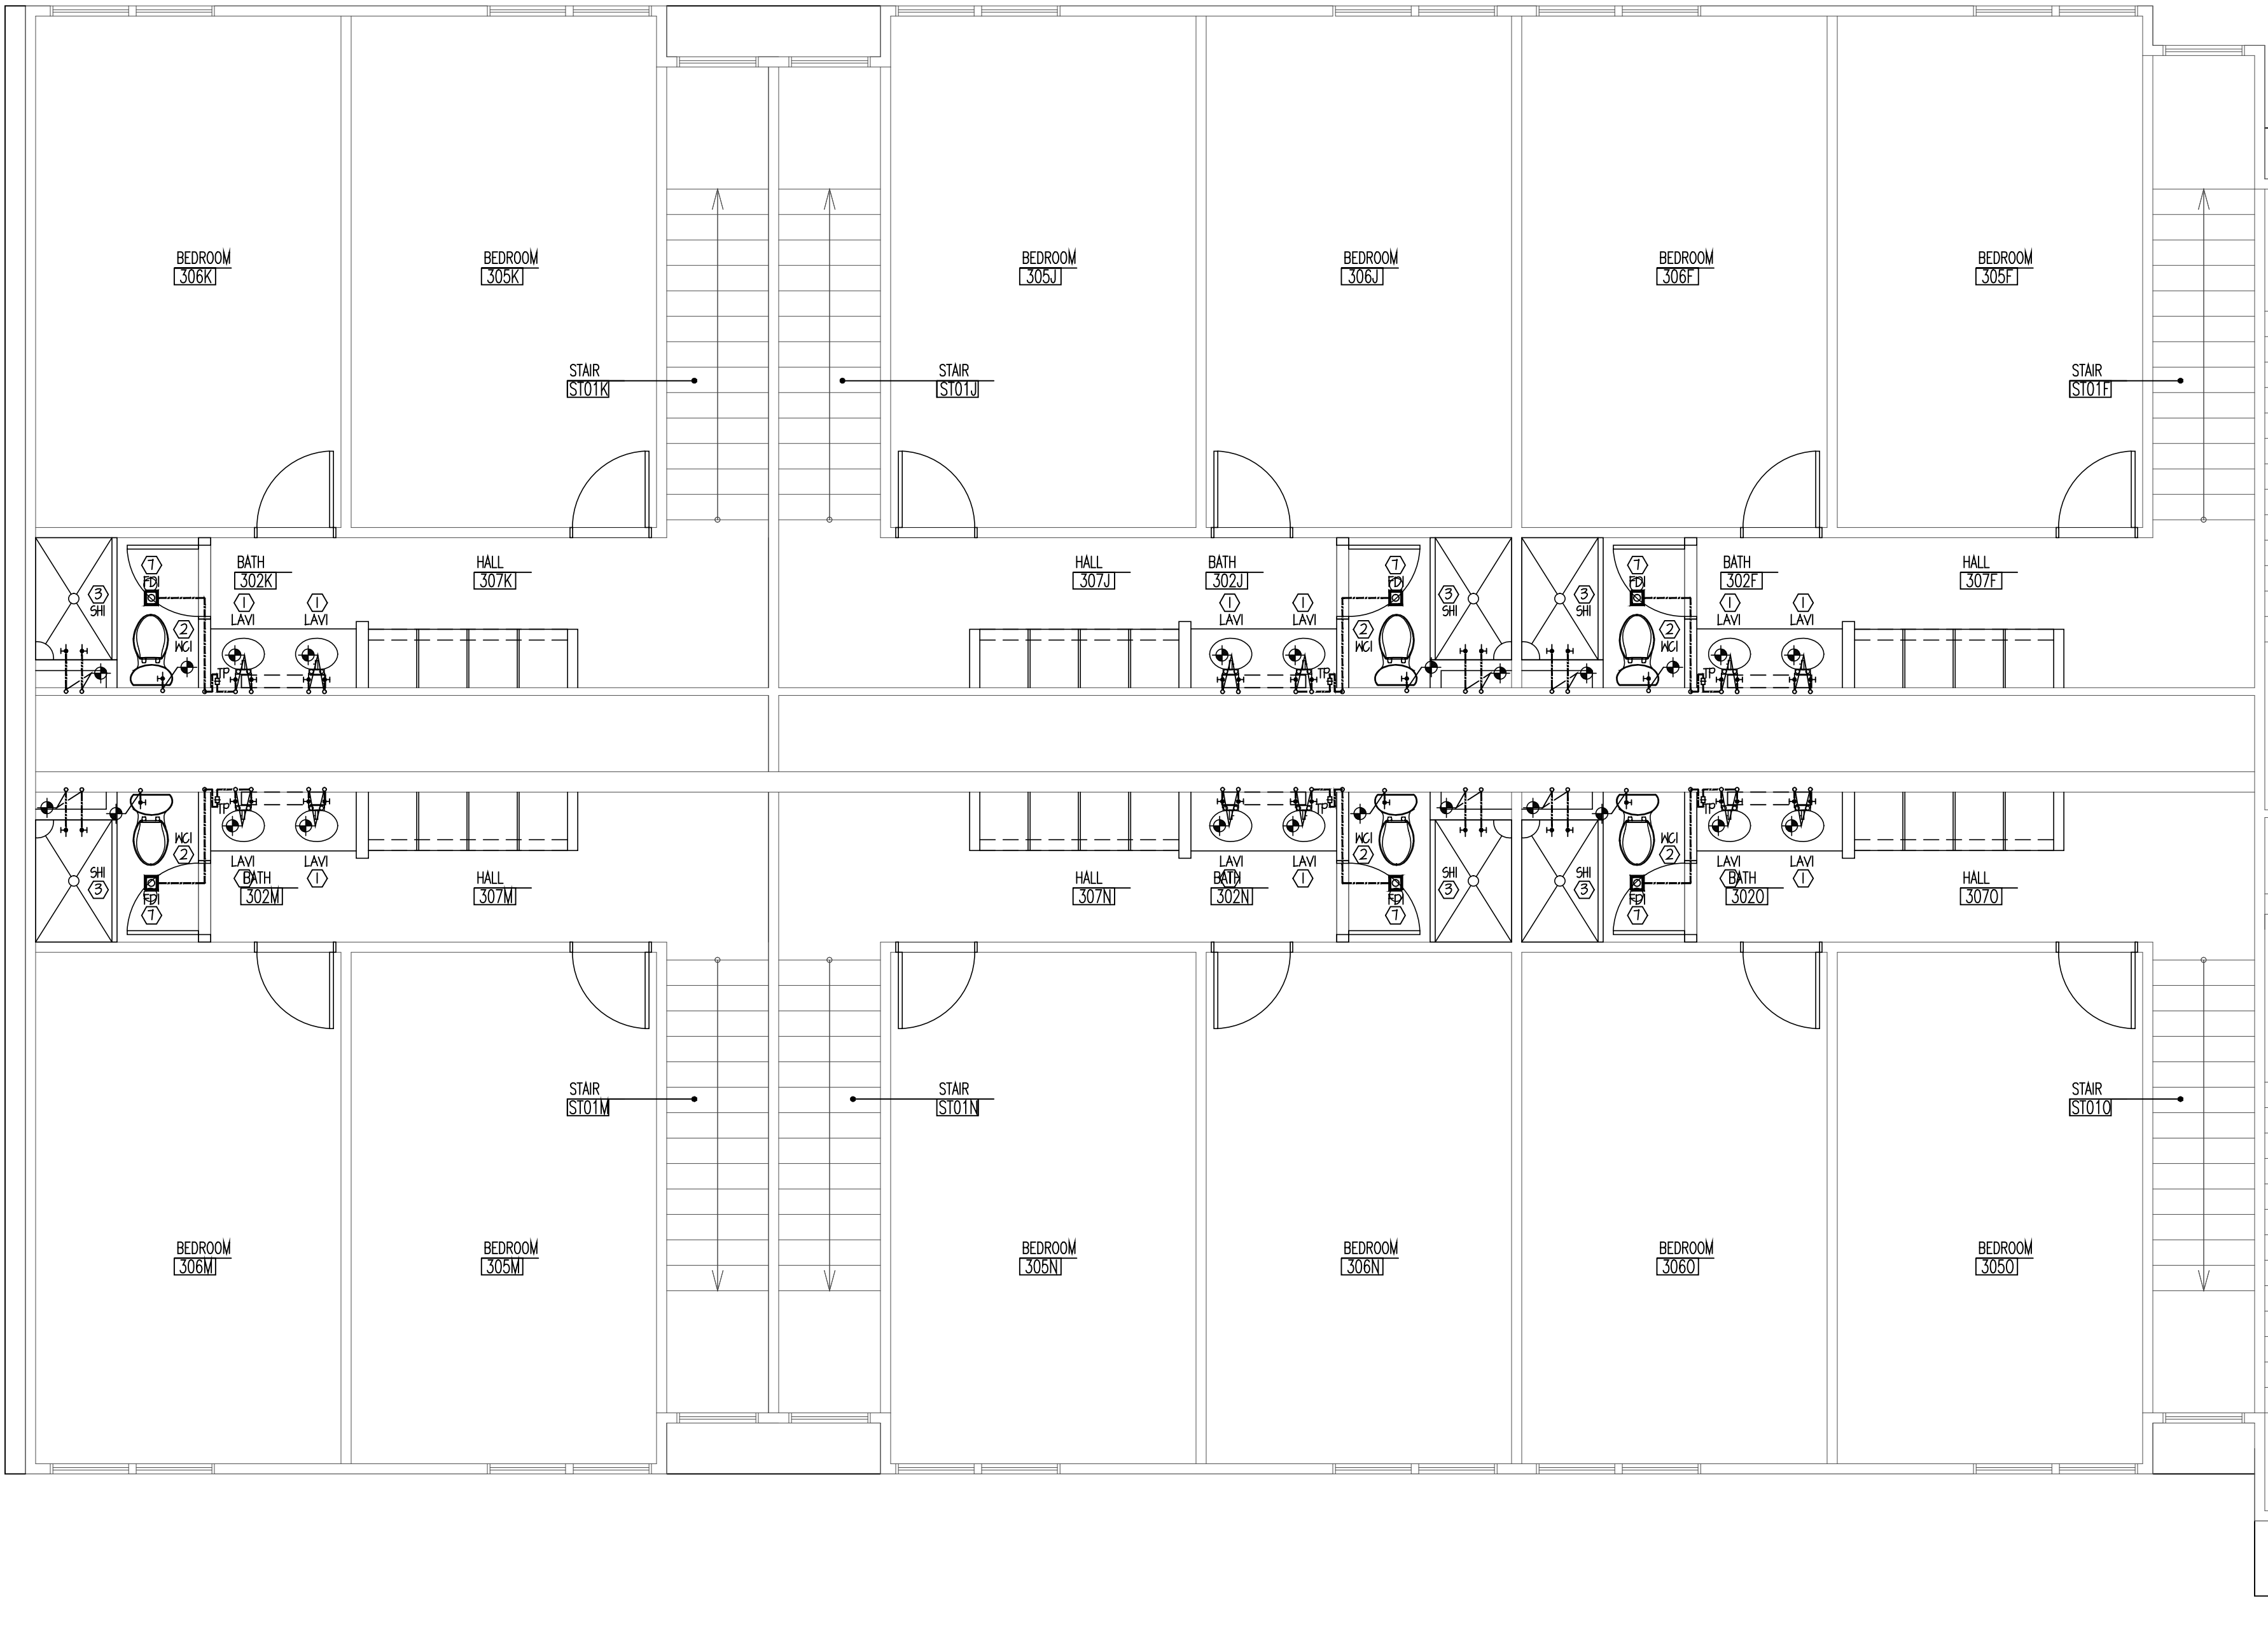


KEY NOTES (SAN. & DW PLAN)

1. NEW LAVATORY TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT AND DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM HALL ESCAPE/REAR TRAP WITH CLEANOUT, TAILPIECE, STOP VALVES, FLEX SUPPLIES AND FAUCETS FOR ALL LAYS AND INSULATION KITS FOR ACCESSIBLE LAYS.
2. NEW FLOOR MOUNTED WATER CLOSET TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT, DOMESTIC COLD WATER LINES, ETC. AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM, TAILPIECE, STOP VALVES AND FAUCETS FOR ALL SHOWERS.
3. NEW SHOWER TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT AND DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM, TAILPIECE, STOP VALVES AND FAUCETS FOR ALL SHOWERS.
4. NEW KITCHEN SINK TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT AND DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW FIXTURE. PROVIDE NEW WASTE ARM, HALL ESCAPE/REAR TRAP WITH CLEANOUT, TAILPIECE, STOP VALVES, FLEX SUPPLIES AND FAUCET.
5. NEW HOT WATER HEATER TO BE INSTALLED. MODIFY EXISTING DOMESTIC HOT AND COLD WATER LINES AS REQUIRED TO ALLOW FOR NEW WATER HEATER. PROVIDE NEW VALVES EXPANSION TANK, RELIEF VALVES, ETC.
6. EXISTING FLOOR DRAIN TO REMAIN.
7. NEW FLOOR DRAIN TO BE INSTALLED. MODIFY EXISTING SANITARY, VENT, DOMESTIC COLD WATER LINES, ETC. AS REQUIRED TO ALLOW FOR NEW FLOOR DRAIN. PROVIDE FLOOR DRAIN WITH NEW TRAP PRIMER.

Revisions

Date	Issue	Description
06-03-15	1	ISSUE FOR CONSTRUCTION

Key Plan

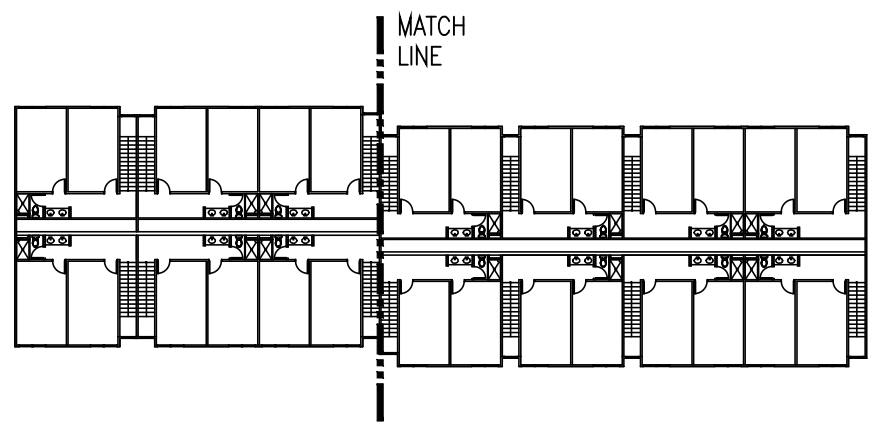

Consultants

LINWOOD ENGINEERING ASSOCIATES, P.A.

CONSULTING MECHANICAL & ELECTRICAL ENGINEERS

LEA 955 Lincoln Ave. 2301 Dupont Drive-Suite 150
Glen Rock, New Jersey Irvine, California
07452 92512
t: 201.857.3998 t: 714.424.0001
f: 201.857.3994 f: 714.424.0004
www.linwoodengineering.com

Michael T. Davina, P.E. **Robert J. Hatch, P.E.**

NJ #48654 AR #13868
CT #0025779 CA #E16118
CT #13318 FL #69560
MA #48516
NJ #30419
NV #0199375
NY #56608
PA #036014-E

Project

INTERIOR RENOVATIONS
AT THE
TAMARACK - N RESIDENCE

RAMAPO COLLEGE
OF NEW JERSEY

505 Ramapo Valley Road
Mahwah, New Jersey 07430-1680

Client

RAMAPO COLLEGE
OF NEW JERSEY

505 Ramapo Valley Road
Mahwah, New Jersey 07430-1680

SNS Architects & Engineers, PC

1 PARAGON DRIVE, MONTVALE, NEW JERSEY, 07645
tel: 201.573.1767 fax: 201.573.0808 www.sns-arch-eng.com

Fay W. Logan, AIA ☐
John M. Lignos, AIA ☐
Lorin J. Sonenshine, AIA ☐
Steven Napolitano, PE ☐

Cert./Lic. No. _____

Date 04-10-15 Scale AS NOTED

Drawn By MD Checked By SG

Dwg. Title
THIRD FLOOR DOMESTIC WATER PLAN

Work Order No. _____ Dwg. No. _____

4698N **P302**

MATCH
LINE

THIRD FLOOR DOMESTIC WATER PLAN

SCALE: 1/4"=1'-0"